



APPROBATION MARKS IN THE CATALOGUE



ITALY



GERMANY



HOLLAND



UNITED STATES



INDEX


	pag.
Porcelain lampholders with E.27 connection	3
Porcelain lampholders with E.40 connection	9
Porcelain lampholders with E.14 connection	10
Porcelain lampholders with E.27 connection	12
Porcelain lampholders with B.15-B.22 connection	13
Metal rings	14
Aluminium lampholders with E.27 connection	14
Metal lampholders with E.27 connection	15
Metal lampholders with E.14 connection	17
Metal lampholders with E.27 connection	18
Metal capholders	19
Brass lampholders with B.15-B.22 connection	20
Thermosetting resin rings	21
Thermoplastic light-point with E.27 connection	22
Thermoplastic lampholders with E.14 connection	22
Thermosetting resin lampholders with E.27 connection	23
Thermosetting resin lampholders with metal nipple, with E.27 connection	24
Thermoplastic lampholders monocasing with E.27 connection	25
Thermosetting resin lampholders with switch, with E.27 connection	26
Thermosetting resin lampholders with E.14 connection	27
Thermosetting resin lampholders with metal nipple, with E.14 connection	28
Thermoplastic lampholders monocasing with E.14 connection	29
Thermoplastic lampholders	30
Thermoplastic candle lampholders with E.14 connection	31
Thermoplastic candle covering for lampholders with E.27 connection	32
Steatite lampholders for low tension halogen lamps	32
Thermoplastic lampholders for low tension halogen lamps	35
Lampholders for incandescent halogen lamps for net tension with R7s connection	36
Lampholders for incandescent halogen lamps for net tension and accessories	40
Lampholders for discharge lamps with RX7s connection	41
Lampholders with GX16D connection (par 56)	43
Lampholders for discharge lamps with PG12-G12 connection	44
Lampholders for discharge lamps with G12-G8.5-FC2 connection	45
Lampholders for fluorescent lamps with G13 connection	46
Lampholders for fluorescent lamps with G13-2G10-2G11 connection	47
Lampholders for fluorescent lamps with G5 connection	48
Portastarter	48
Lampholders for fluorescent lamps with G10Q-G23 connection	49
Lampholders for fluorescent lamps with G24D1-G24Q1 connection and accessories	50
Switches	51
Spiral cables	55
Cables	56
Pendent	56
Ceiling-rose	57
Hooks and cable-clamps	58
Accessories for illumination	59
Various pliers	60
Steatite terminals	62
Steel and copper normal closing collars	64
Heavy hooks	64
Light hooks	64
Cavallotti	64
Morsetti volanti	65
Cable-clamps	65
Sheathings	66
Lights	72
Light-bulbs and transformers	76
Blisterated materials	77
Fusible bars in antiarco alloy	79

PORCELAIN LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection



0072

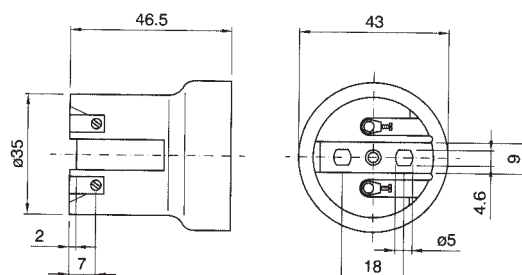


Diameter: mm. 43
Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²
Fixing: with passer-by holes for M4 screws
Cap: zinc-coated steel
Rated voltage: 750 V

Quantity: N° 50 pieces

Lampholders with E.27 connection




0072/73

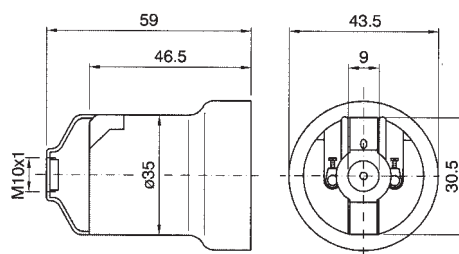


Diameter: mm. 43
Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²
Fixing: with steel fixing bracket with M10/1 threaded hole
Cap: zinc-coated steel
Rated voltage: 750 V

Quantity: N° 30 pieces

Lampholders with E.27 connection

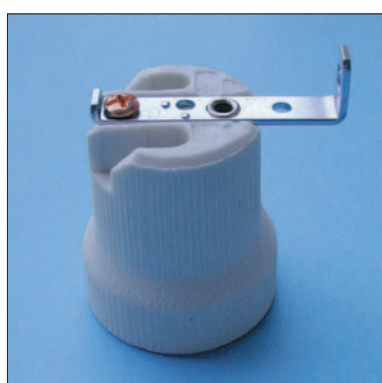

0072/74

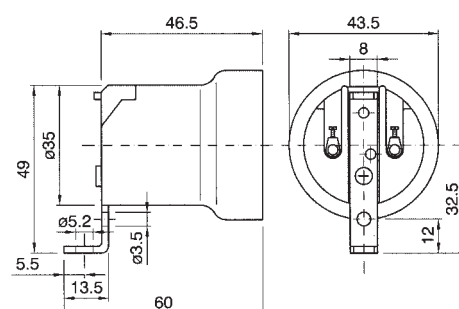


Diameter: mm. 43
Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²
Fixing: with steel fixing bracket with Ø 5,2 hole and screw for groundwire
Cap: zinc-coated steel
Rated voltage: 750 V


Quantity: N° 40 pieces

PORCELAIN LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection

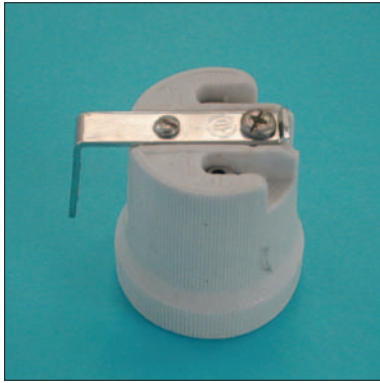

0072/74SG

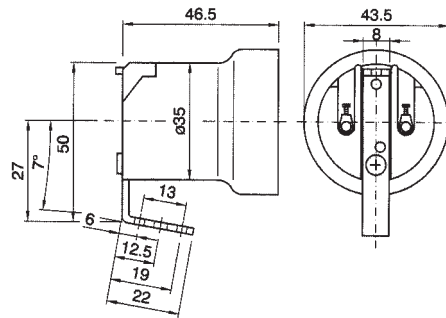

Diameter: mm. 43


Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²

Fixing: with steel fixing bracket with two M3 threaded holes (interax 13 mm.) and central M4 threaded hole


Cap: zinc-coated steel
Rated voltage: 750 V

Quantity: N° 40 pieces

Lampholders with E.27 connection

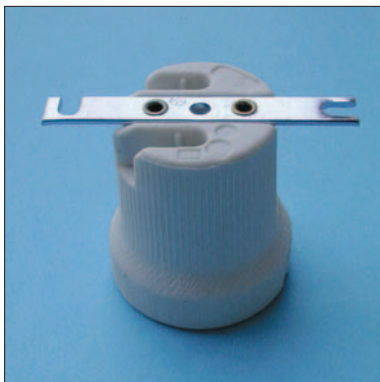

0072/75

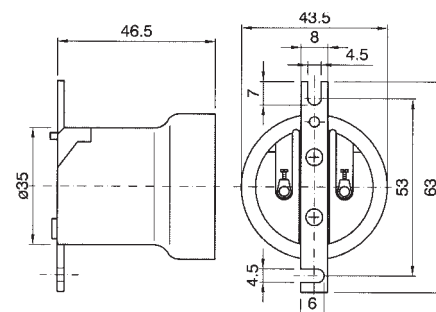

Diameter: mm. 43

Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²

Fixing: with steel fixing plate, with two slot holes for M4 screws, interax mm.53

Cap: zinc-coated steel
Rated voltage: 750 V

Quantity: N° 40 pieces

Lampholders with E.27 connection



0072/76

Diameter: mm. 43

Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²

Fixing: with steel fixing bracket with cord-lock

Cap: zinc-coated steel
Rated voltage: 750 V


Quantity: N° 30 pieces

PORCELAIN LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection



0072/77

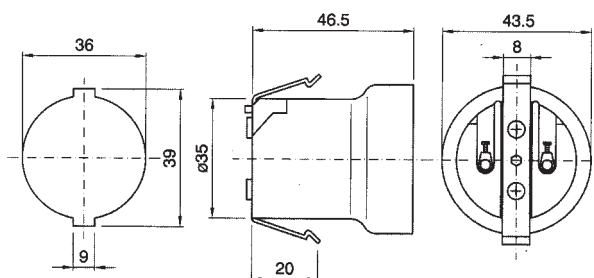


Diameter: mm. 43
Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²
Fixing: with spring steel fixing bracket (see indicated perforation)
Cap: zinc-coated steel
Rated voltage: 750 V

Quantity: N° 40 pieces

Lampholders with E.27 connection



0072/78

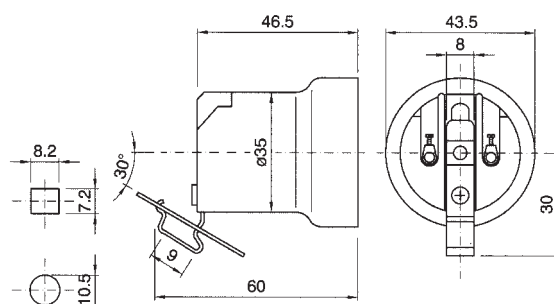

Diameter: mm. 43
Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²
Fixing: with spring steel fixing bracket (see indicated perforation)
Cap: zinc-coated steel
Rated voltage: 750 V

Quantity: N° 40 pieces

Lampholders with E.27 connection



SAVOIA

Diameter: mm. 50
Clamps: brass with screw
Fixing: central hole \varnothing 5
Cap: tropical iron


Quantity: N° 40 pieces

PORCELAIN LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection **3 Pieces**



0160

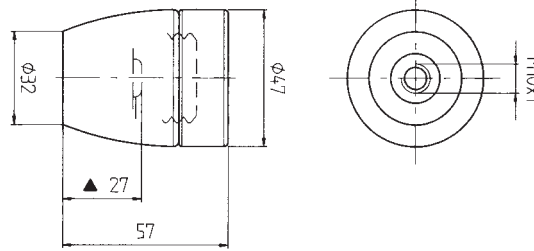

Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²

Fixing: M10/1 adapter and screw for nipple-block


Rated voltage: 500 V

Quantity: N° 10 pieces

Lampholders with E.27 connection **3 Pieces**



1060

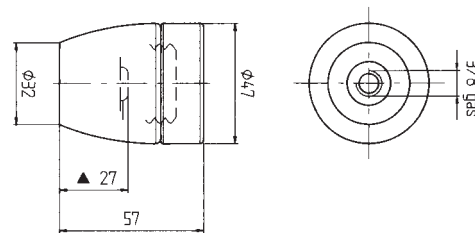

Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²

Fixing: 3/8" adapter and screw for nipple-block


Rated voltage: 500 V

Quantity: N° 10 pieces

Lampholders with E.27 connection



0093

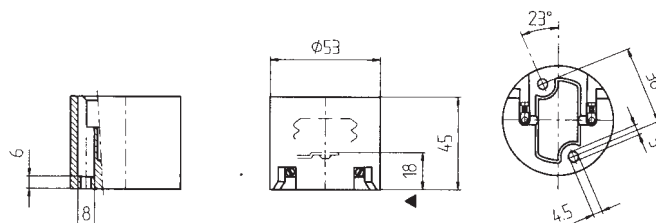

Diameter: mm. 52

Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²


Fixing: with passer-by holes for M4 screws interax mm. 38

Cap: zinc-coated steel
Rated voltage: 250 V


Quantity: N° 10 pieces

PORCELAIN LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection

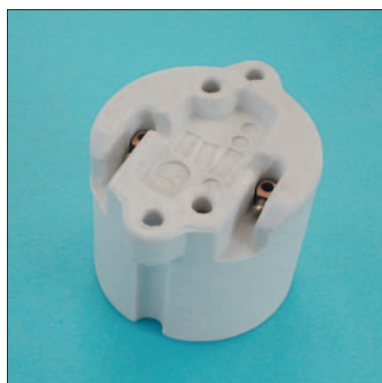

0093/AL

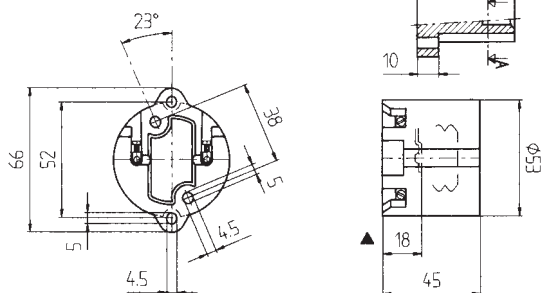


Diameter: mm. 53
Clamps: screw clamps for rigid or flexible cables from 0,5 to 1 mm²
Fixing: with passer-by holes for M4 screws interax mm. 52
Cap: zinc-coated steel
Rated voltage: 750 V

Quantity: N° 10 pieces

Lampholders with E.27 connection



0094

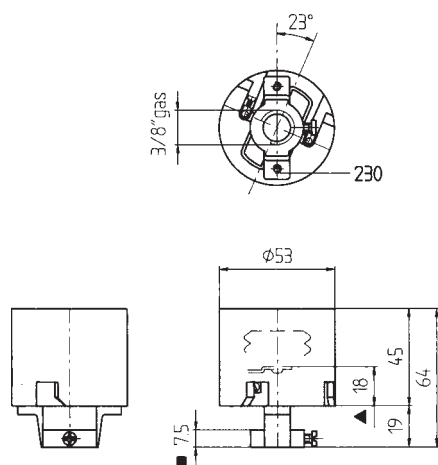


Diameter: mm. 52
Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²
Fixing: aluminium adapter with 3/8" threaded hole
Cap: zinc-coated steel
Rated voltage: 250 V

Quantity: N° 10 pieces

Lampholders with E.27 connection



0133

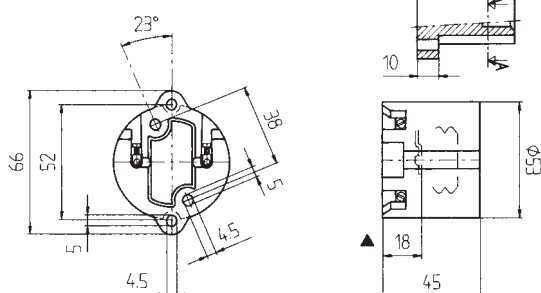

Diameter: mm. 52
Clamps: brass clamps with screw nickel-plated
Fixing: with passer-by holes Ø 4,5 interax mm. 52
Cap: nickel-plated die-cast brass
Rated voltage: 500 V


Quantity: N° 10 pieces

PORCELAIN LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection



0134

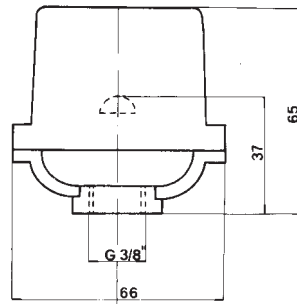


Diameter: mm. 52
Clamps: brass clamps with screw nickel-plated
Fixing: aluminium adapter with 3/8" threaded hole
Cap: nickel-plated die-cast brass
Rated voltage: 500 V


Quantity: N° 10 pieces

PORCELAIN LAMPHOLDERS WITH E.40 CONNECTION

Lampholders with E.40 connection

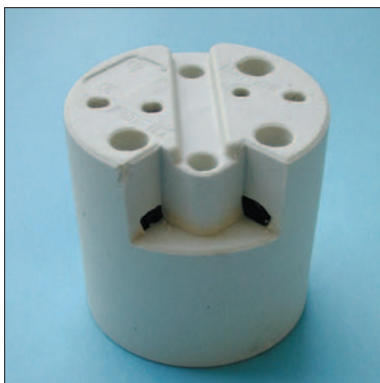

0135

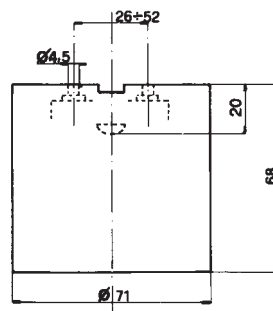


Diameter: mm. 70
Clamps: brass clamps with screw nickel-plated
Fixing: with passer-by holes Ø 4,5 interax mm. 52
Cap: nickel-plated die-cast brass
Rated voltage: 750 V

Quantity: N° 10 pieces

Lampholders with E.40 connection



0136

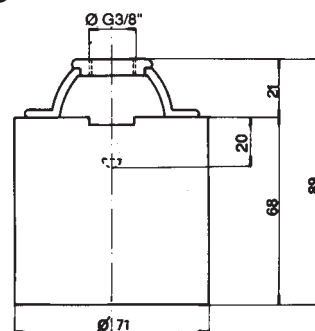

Diameter: mm. 70
Clamps: brass clamps with screw nickel-plated
Fixing: aluminium adapter with 3/8" threaded hole
Cap: nickel-plated die-cast brass
Rated voltage: 750 V


Quantity: N° 10 pieces

PORCELAIN LAMPHOLDERS WITH E.40 CONNECTION

Lampholders with E.40 connection




0135/R

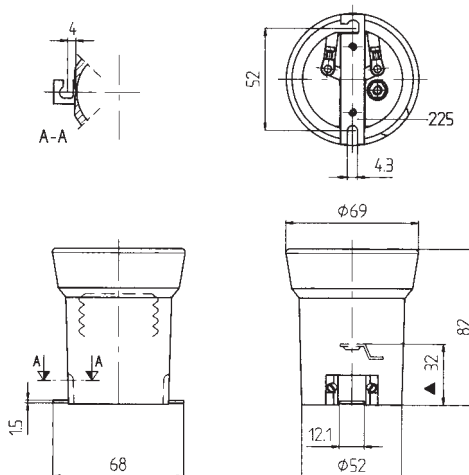


Diameter: mm. 52
Clamps: brass screw
Fixing: with steel zinc-plated fixing bracket interax mm. 52
Cap: treated slab
Rated voltage: 750 V

Quantity: N° 10 pieces

Lampholders with E.40 connection

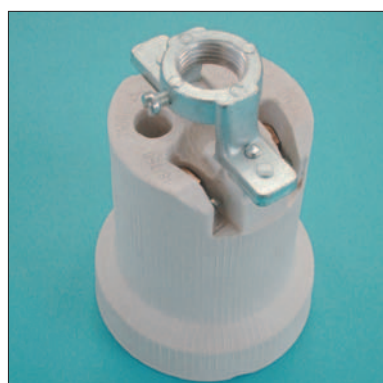

0135/P

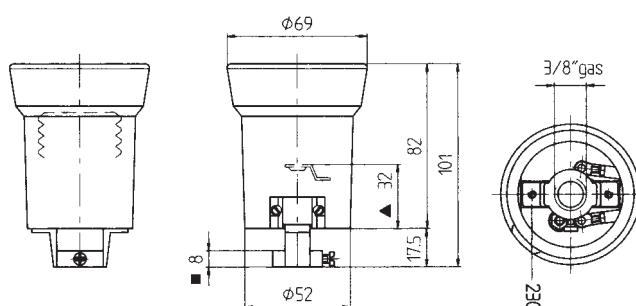


Diameter: mm. 52
Clamps: brass screw
Fixing: die-cast aluminium adapter with 3/8" threaded hole
Cap: treated slab
Rated voltage: 750 V

Quantity: N° 10 pieces

Lampholders with E.40 connection



0135/SN

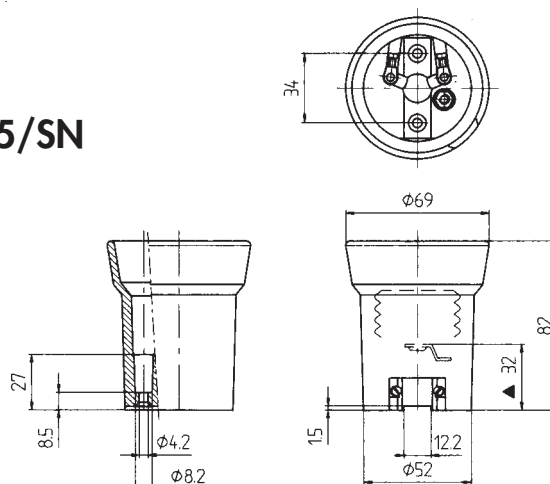

Diameter: mm. 52
Clamps: brass screw
Fixing: with passer-by holes \varnothing 4,2 interax mm. 34
Cap: treated slab
Rated voltage: 750 V


Quantity: N° 10 pieces

PORCELAIN LAMPHOLDERS WITH E.14 CONNECTION

Lampholders with E.14 connection



0095

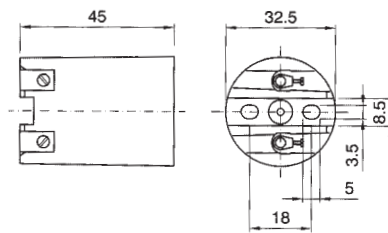


Diameter: mm. 33
Clamps: brass with screw
Fixing: with passer-by holes \varnothing 3,2
interax mm. 30
Cap: zinc-coated steel
Rated voltage: 250 V

Quantity: N° 50 pieces

Lampholders with E.14 connection



0095/A

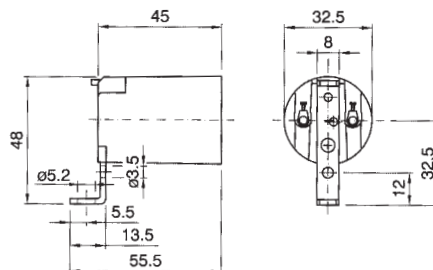


Diameter: mm. 33
Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²
Fixing: with metal bracket \varnothing 5,2
Cap: zinc-coated steel

Quantity: N° 50 pieces

Lampholders with E.14 connection



0095/B

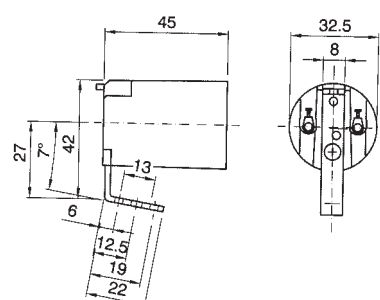

Diameter: mm. 33
Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²
Fixing: with steel fixing bracket with two M3 threaded holes (interax 13 mm.) and central M4 threaded hole
Cap: zinc-coated steel


Quantity: N° 50 pieces

PORCELAIN LAMPHOLDERS WITH E.14 CONNECTION

Lampholders with E.14 connection



0095/C

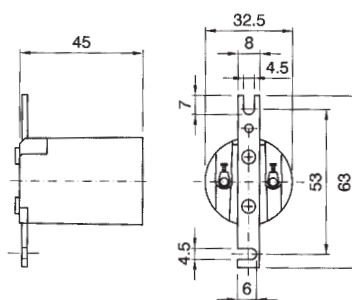


Diameter: mm. 33
Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²
Fixing: with steel fixing plate with two M4 passer-by holes, interax 53 mm.
Cap: zinc-coated steel

Quantity: N° 50 pieces

Lampholders with E.14 connection




0095/D

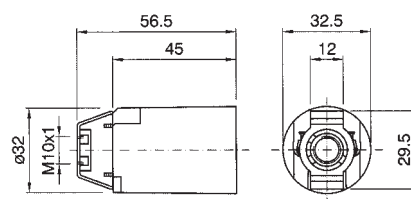

Diameter: mm. 33
Clamps: screw clamps for rigid or flexible cables from 0,5 to 2,5 mm²
Fixing: with steel fixing bracket with metal threaded nipple (M10/1) and screw for tige-block
Cap: zinc-coated steel

Quantity: N° 50 pieces

Lampholders with E.14 connection

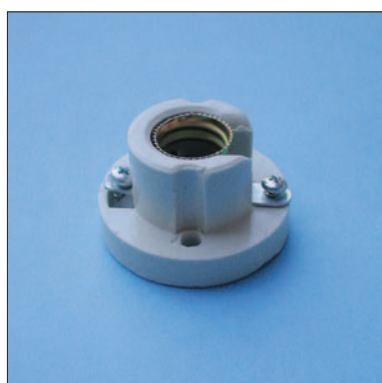

0051

Diameter: mm. 40
Clamps: treated iron
Fixing: passer-by holes Ø 3
Cap: treated iron

Quantity: N° 100 pieces

PORCELAIN LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection with bend base



0068

Clamps: brass clamps with screw nickel-plated
Fixing: with passer-by holes \varnothing 4,5 interax mm. 51
Contacts: zinc-coated steel

Quantity: N° 10 pieces

Lampholders with E.27 connection with switch



0070

Clamps: brass clamps with screw nickel-plated
Fixing: with passer-by holes \varnothing 4,5 interax mm. 51
Contacts: zinc-coated steel

Quantity: N° 10 pieces

Lampholders with E.27 connection with straight base




0071

Clamps: brass clamps with screw nickel-plated
Fixing: with passer-by holes \varnothing 4,5 interax mm. 51
Contacts: zinc-coated steel


Quantity: N° 10 pieces

PORCELAIN LAMPHOLDERS WITH B.15-B.22 CONNECTION

Lampholders with B.15 connection

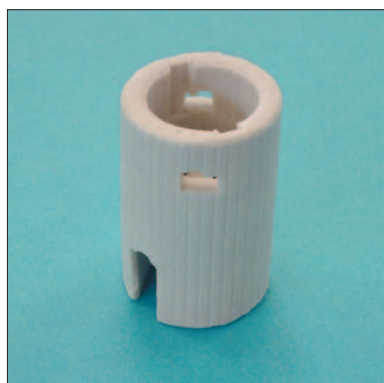

0092/15/PO

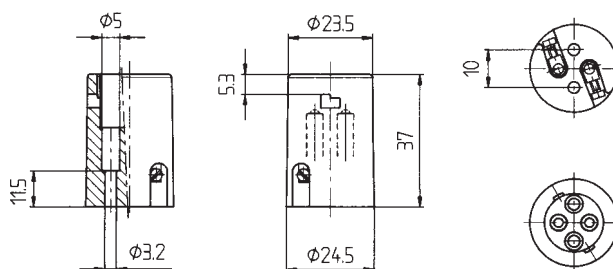

Clamps: brass with screw


Fixing: with passer-by holes $\phi 3,2$ interax mm. 10

Quantity: N° 100 pieces

Lampholders with B.22 connection



0092/22/PO

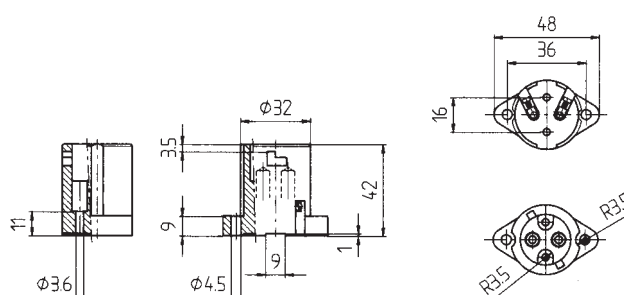

Clamps: brass with screw


Fixing: with passer-by holes $\phi 4,5$ interax mm. 36

Quantity: N° 50 pieces

Lampholders with B.22 connection



0100

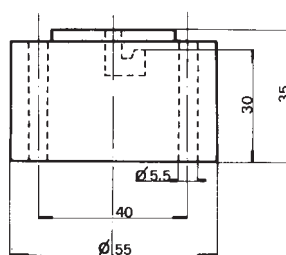

Lampholder with B.22 connection with bakelite cover protection


Clamps: brass with screw

Fixing: with passer-by holes $\phi 5,5$


Quantity: N° 20 pieces

METAL RINGS

Metal ring

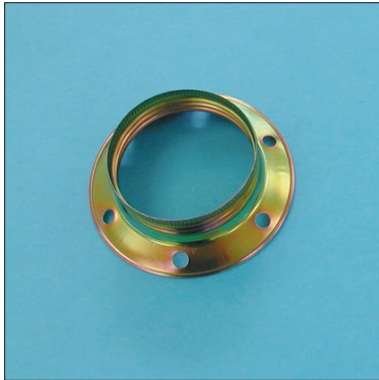

1032

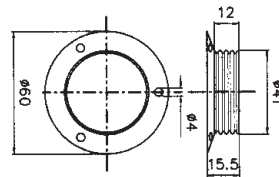


Metal brassed rings
for lampholders with
E.27 connection

Metal ring



1042



Metal brassed rings
for lampholders with
E.14 connection

ALUMINIUM LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection



0124

Diameter: mm. 52
Connection: 3/8"
Clamps: brass clamps
with screw nickel-plated


METAL LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection



1031
1031/ARG

brass coloured
silvery coloured

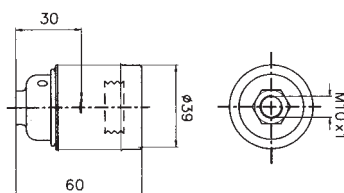

Cover: smooth
Clamps: brass with screw
Body: porcelain
Fixing: M10/1
Rated voltage: 4/250 V


Quantity: N° 40 pieces

Lampholders with E.27 connection



1031/F
1031/F/ARG

brass coloured
silvery coloured

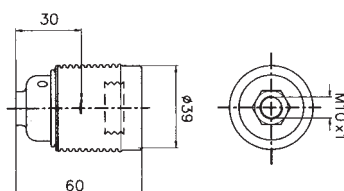

Cover: threaded
Clamps: brass with screw
Body: porcelain
Fixing: M10/1
Rated voltage: 4/250 V


Quantity: N° 40 pieces

Lampholders with E.27 connection



1031/E

brass coloured

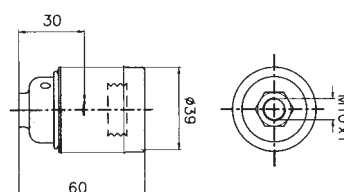

Cover: smooth
Clamps: brass with screw
Lozenge: poliestere resin
Fixing: M10/1
Rated voltage: 4/250 V

Quantity: N° 40 pieces


METAL LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection



1031/E/F

brass coloured

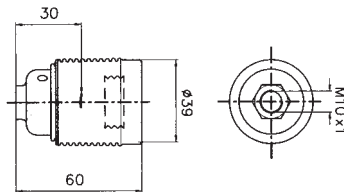

Cover: threaded
Clamps: brass with screw
Lozenge: synthetic resin
Fixing: M10/1
Rated voltage: 4/250 V


Quantity: N° 40 pieces

Lampholders with E.27 connection



2031
2031/ARG

brass coloured
 silvery coloured

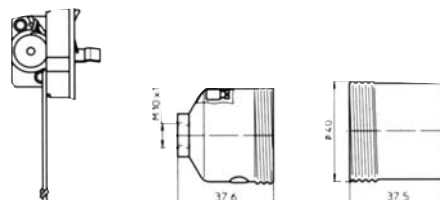

Cover: smooth
Clamps: brass with screw
Body: porcelain with tie switch
Fixing: M10/1
Rated voltage: 4/250 V


Quantity: N° 30 pieces

Lampholders with E.27 connection



2031/F
2031/F/ARG

brass coloured
 silvery coloured

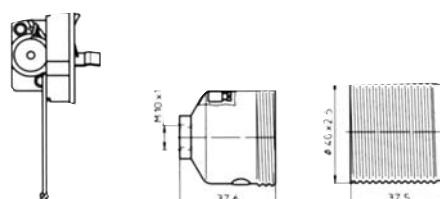

Cover: threaded
Clamps: brass with screw
Body: porcelain with tie switch
Fixing: M10/1
Rated voltage: 4/250 V

Quantity: N° 30 pieces


METAL LAMPHOLDERS WITH E.14 CONNECTION

Lampholders with E.14 connection



1041
1041/ARG

brass coloured
silvery coloured

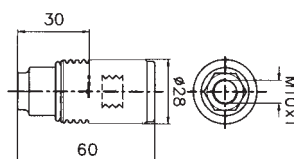

Cover: smooth
Clamps: brass with screw
Body: porcelain
Fixing: M10/1
Rated voltage: 2/250 V


Quantity: N° 50 pieces

Lampholders with E.14 connection



1041/F
1041/F/ARG

brass coloured
silvery coloured

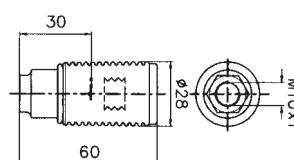

Cover: threaded
Clamps: brass with screw
Body: porcelain
Fixing: M10/1
Rated voltage: 2/250 V


Quantity: N° 50 pieces

Lampholders with E.14 connection



1041/E

brass coloured

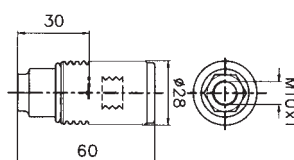

Cover: smooth
Clamps: brass with screw
Body: thermoplastic
Fixing: M10/1
Rated voltage: 2/250 V

Quantity: N° 50 pieces


METAL LAMPHOLDERS WITH E.14 CONNECTION

Lampholders with E.14 connection



1041/E/F

brass coloured

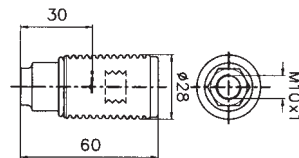

Cover: threaded
Clamps: brass with screw
Body: thermoplastic
Fixing: M10/1
Rated voltage: 2/250 V

Quantity: N° 50 pieces

Lampholders with E.14 connection



1036

Cover: smooth with porcelain ring
Clamps: brass with screw
Lozenge: porcelain
Fixing: M10/1
Rated voltage: 2/250 V

Quantity: N° 50 pieces

METAL LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection



1035

Cover: smooth with porcelain ring
Clamps: brass with screw
Lozenge: porcelain
Fixing: M10/1
Rated voltage: 4/250 V

Quantity: N° 40 pieces

METAL CAPHOLDERS

Capholders with E.14 connection



0054

Metal capholders with E.14 connection with wings

Quantity: N° 100 pieces

Capholders with E.10 connection



0154

Metal capholders with E.10 connection with wings

Quantity: N° 100 pieces

Capholders with E.14 connection



0055

Metal capholders with E.14 connection with screw and nuts

Quantity: N° 100 pieces

Capholders with E.14 connection



1055

Metal capholders with E.14 connection with rivet

Quantity: N° 100 pieces


BRASS LAMPHOLDERS WITH B.15-B.22 CONNECTION

Lampholders with B.15 connection



0092/15
0092/15/ARG

brass coloured
silvery coloured

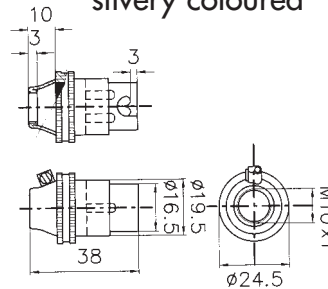

Cover: brass smooth
Clamps: brass
Body: porcelain
Fixing: M10/1
Clamp for ground wire


Quantity: N° 100 pieces

Lampholders with B.15 connection



0092/15/F
0092/15/F/ARG

brass coloured
silvery coloured

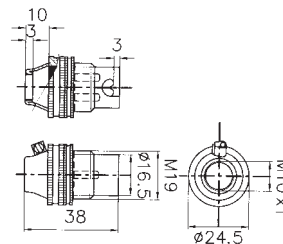

Cover: brass threaded
Clamps: brass
Body: porcelain
Fixing: M10/1
Clamp for ground wire


Quantity: N° 100 pieces

Lampholders with B.22 connection



0092/22
0092/22/ARG

brass coloured
silvery coloured

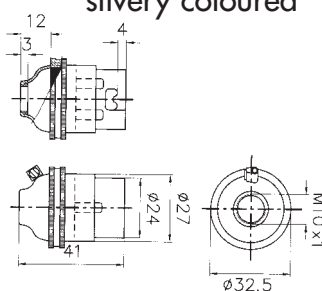

Cover: brass smooth
Clamps: brass
Body: porcelain
Fixing: M10/1
Clamp for ground wire


Quantity: N° 50 pieces

Lampholders with B.22 connection



0092/22/F
0092/22/F/ARG

brass coloured
silvery coloured

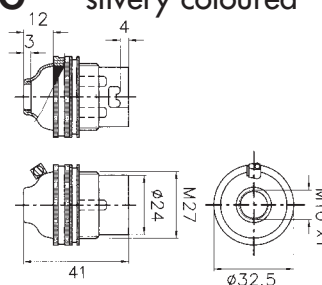


Cover: brass threaded
Clamps: brass
Body: porcelain
Fixing: M10/1
Clamp for ground wire

Quantity: N° 50 pieces

THERMOSETTING RESIN RINGS


Thermosetting resin ring

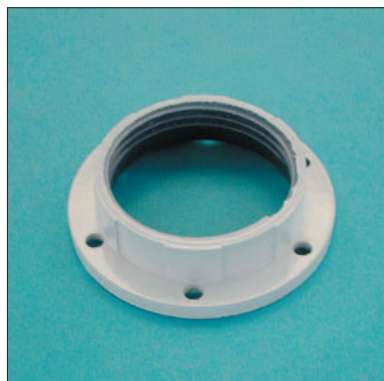


0231
0231/N
0231/OR
0231/ARG

white coloured
 black coloured
 gold coloured
 silvery coloured

Thermosetting resin ring for E.27 lampholders

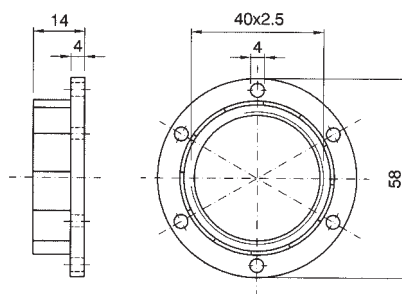


Thermosetting resin ring

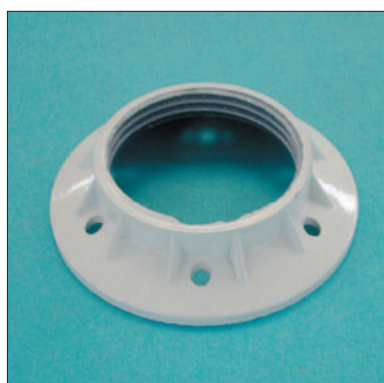

0233
0233/N
0233/OR
0233/ARG

white coloured
 black coloured
 gold coloured
 silvery coloured

Thermosetting resin ring for E.27 lampholders

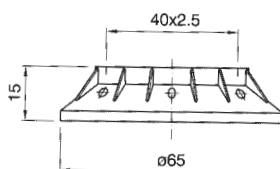


Thermosetting resin ring



0235
0235/N
0235/OR
0235/ARG

white coloured
 black coloured
 gold coloured
 silvery coloured

Thermosetting resin ring for E.14 lampholders

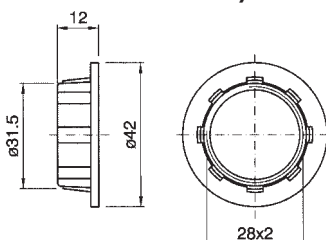


THERMOPLASTIC LIGHT-POINT WITH E.27 CONNECTION

Lampholders with E.27 connection



0079
0079/N

white coloured
black coloured



Base: bend
Diameter: mm. 83
Fixing: with 2 passer-by
holes \varnothing 4
interax mm. 65


Quantity: N° 25 pieces

Lampholders with E.27 connection



0080
0080/N

white coloured
black coloured



Base: straight
Diameter: mm. 83
Fixing: with 2 passer-by
holes \varnothing 4
interax mm. 65

Quantity: N° 25 pieces

THERMOPLASTIC LAMPHOLDERS WITH E.14 CONNECTION

Lampholders with E.14 connection



0131
0131/N

white coloured
black coloured

Diameter: mm. 27
Cover: smooth
Height: mm. 36
Rated voltage: 250 V

Quantity: N° 100 pieces

THERMOSETTING RESIN LAMPHOLDERS WITH E.27 CONNECTION

Lampholders with E.27 connection




0165
0165/N
0165/OR
0165/ARG

white coloured
 black coloured
 gold coloured
 silvery coloured

Diameter: mm. 38
Cover: smooth
Fixing: M10/1
Rated voltage: 250 V

Quantity: N° 100 pieces



Lampholders with E.27 connection




0191
0191/N
0191/OR
0191/ARG

white coloured
 black coloured
 gold coloured
 silvery coloured

Diameter: mm. 38
Cover: partially threaded
Fixing: M10/1
Rated voltage: 250 V

Quantity: N° 30 pieces



Lampholders with E.27 connection




0192
0192/N
0192/OR
0192/ARG

white coloured
 black coloured
 gold coloured
 silvery coloured

Diameter: mm. 38
Cover: threaded
Fixing: M10/1
Rated voltage: 250 V

Quantity: N° 30 pieces



THERMOSETTING RESIN LAMPHOLDERS WITH METAL NIPPLE, WITH E.27 CONNECTION


Lampholders with E.27 connection



0165/P
0165/N/P
0165/OR/P
0165/ARG/P

white coloured
black coloured
gold coloured
silvery coloured

Diameter: mm. 38
Cover: smooth
Fixing: M10/1 metal nipple with screw for nipple-block
Rated voltage: 250 V



Quantity: N° 100 pieces


Lampholders with E.27 connection



0191/P
0191/N/P
0191/OR/P
0191/ARG/P

white coloured
black coloured
gold coloured
silvery coloured

Diameter: mm. 38
Cover: partially threaded
Fixing: M10/1 metal nipple with screw for nipple-block
Rated voltage: 250 V



Quantity: N° 30 pieces


Lampholders with E.27 connection



0192/P
0192/N/P
0192/OR/P
0192/ARG/P

white coloured
black coloured
gold coloured
silvery coloured

Diameter: mm. 38
Cover: threaded
Fixing: M10/1 metal nipple with screw for nipple-block
Rated voltage: 250 V



Quantity: N° 30 pieces


THERMOPLASTIC LAMPHOLDERS MONOCASING WITH E.27 CONNECTION

Hat with E.27 connection



0065/C
0065/N/C
0065/OR/C

white coloured
black coloured
gold coloured

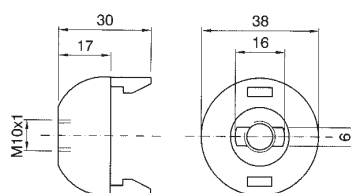


Hat for E.27 monocasing lampholders
Fixing: M10/1 with screw for nipple-block

Lampholders with E.27 connection



2165
2165/N
2165/OR

white coloured
black coloured
gold coloured

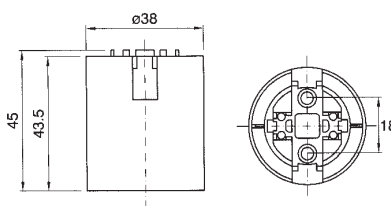


Diameter: mm. 38
Cover: smooth
Clamps: spring clamps for cables from 0,5 to 2,5 mm²
Fixing: passer-by holes Ø 4,5 interax mm. 18
Rated voltage: 4/250 V
Quantity: N° 100 pieces

Lampholders with E.27 connection




2191
2191/N
2191/OR

white coloured
black coloured
gold coloured

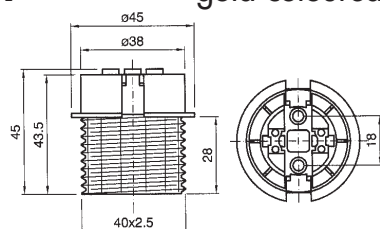


Diameter: mm. 40
Cover: partially threaded
Clamps: spring clamps for cables from 0,5 to 2,5 mm²
Fixing: passer-by holes Ø 4,5 interax mm. 18
Rated voltage: 4/250 V
Quantity: N° 100 pieces

Lampholders with E.27 connection

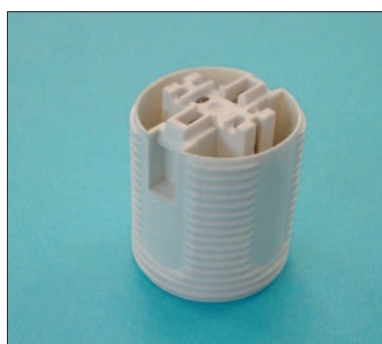

2192
2192/N
2192/OR

white coloured
black coloured
gold coloured

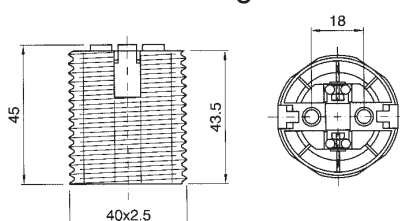

Diameter: mm. 40
Cover: threaded
Clamps: spring clamps for cables from 0,5 to 2,5 mm²
Fixing: passer-by holes Ø 4,5 interax mm. 18
Rated voltage: 4/250 V
Quantity: N° 100 pieces





THERMOSETTING RESIN LAMPHOLDERS WITH SWITCH, WITH E.27 CONNECTION

Lampholders with E.27 connection



0195
0195/N
0195/OR

white coloured
black coloured
gold coloured



Diameter: mm. 38
Cover: smooth
Fixing: M10/1 metal nipple with screw for nipple-block
Rated voltage: 250 V




Quantity: N° 50 pieces

Lampholders with E.27 connection



0196
0196/N
0196/OR

white coloured
black coloured
gold coloured



Diameter: mm. 38
Cover: threaded
Fixing: M10/1 metal nipple with screw for nipple-block
Rated voltage: 250 V





Quantity: N° 50 pieces

Lampholders with E.27 connection



0197
0197/N
0197/OR

white coloured
black coloured
gold coloured

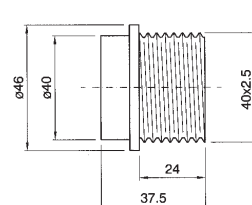

Diameter: mm. 38
Cover: partially threaded
Fixing: M10/1 metal nipple with screw for nipple-block
Rated voltage: 250 V

Quantity: N° 50 pieces

THERMOSETTING RESIN LAMPHOLDERS WITH E.14 CONNECTION

Lampholders with E.14 connection




0166
0166/N
0166/OR
0166/ARG

white coloured
 black coloured
 gold coloured
 silvery coloured

Diameter: mm. 27
Cover: smooth
Fixing: M10/1
Rated voltage: 250 V

Quantity: N° 100 pieces



Lampholders with E.14 connection




0193
0193/N
0193/OR
0193/ARG

white coloured
 black coloured
 gold coloured
 silvery coloured

Diameter: mm. 27
Cover: partially threaded
Fixing: M10/1
Rated voltage: 250 V

Quantity: N° 50 pieces



Lampholders with E.14 connection




0194
0194/N
0194/OR
0194/ARG

white coloured
 black coloured
 gold coloured
 silvery coloured

Diameter: mm. 27
Cover: threaded
Fixing: M10/1
Rated voltage: 250 V

Quantity: N° 50 pieces



THERMOSETTING RESIN LAMPHOLDERS WITH METAL NIPPLE, WITH E.14 CONNECTION

Lampholders with E.14 connection




0166/P
0166/N/P
0166/OR/P
0166/ARG/P

white coloured
black coloured
gold coloured
silvery coloured

Diameter: mm. 27
Cover: smooth
Fixing: M10/1 metal nipple with screw for nipple-block
Rated voltage: 250 V

Quantity: N° 100 pieces



Lampholders with E.14 connection




0193/P
0193/N/P
0193/OR/P
0193/ARG/P

white coloured
black coloured
gold coloured
silvery coloured

Diameter: mm. 27
Cover: partially threaded
Fixing: M10/1 metal nipple with screw for nipple-block
Rated voltage: 250 V

Quantity: N° 50 pieces



Lampholders with E.14 connection




0194/P
0194/N/P
0194/OR/P
0194/ARG/P

white coloured
black coloured
gold coloured
silvery coloured

Diameter: mm. 27
Cover: threaded
Fixing: M10/1 metal nipple with screw for nipple-block
Rated voltage: 250 V

Quantity: N° 50 pieces



THERMOPLASTIC LAMPHOLDERS MONOCASING WITH E.14 CONNECTION


Hat with E.14 connection



0066/C
0066/N/C
0066/OR/C

white coloured
black coloured
gold coloured

Hat for E.14 monocasing lampholders
Fixing: M10/1 with screw for nipple-block

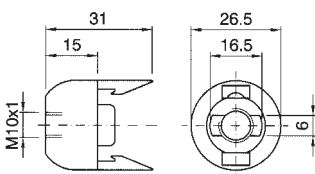


Lampholders with E.14 connection



2166
2166/N
2166/OR

white coloured
black coloured
gold coloured

Diameter: mm. 26,5
Cover: smooth
Clamps: spring clamps for cables from 0,5 to 1,5 mm²
Fixing: passer-by holes Ø 3 interax mm. 14
Rated voltage: 2/250 V
Quantity: N° 100 pieces

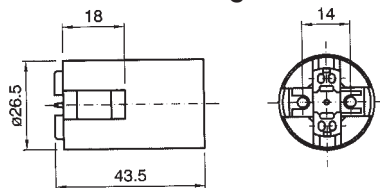


Lampholders with E.14 connection



2193
2193/N
2193/OR

white coloured
black coloured
gold coloured

Diameter: mm. 28
Cover: partially threaded
Clamps: spring clamps for cables from 0,5 to 1,5 mm²
Fixing: passer-by holes Ø 3 interax mm. 14
Rated voltage: 2/250 V
Quantity: N° 100 pieces

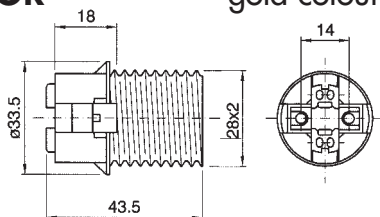


Lampholders with E.14 connection



2194
2194/N
2194/OR

white coloured
black coloured
gold coloured

Diameter: mm. 28
Cover: threaded
Clamps: spring clamps for cables from 0,5 to 1,5 mm²
Fixing: passer-by holes Ø 3 interax mm. 14
Rated voltage: 2/250 V
Quantity: N° 100 pieces

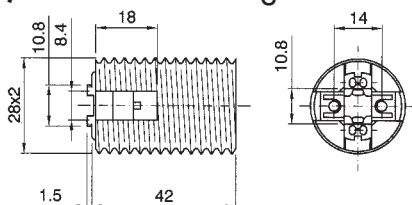

THERMOPLASTIC LAMPHOLDERS

Lampholders with E.10 connection



1051

Diameter: mm. 30

Clamps: brass

Fixing: holes \varnothing 3

Cap: brass

Quantity: N° 100 pieces

Lampholders with E.14 connection



1755
1755/N

white coloured
black coloured


Diameter: mm. 23,5

Clamps: screw

Fixing: hat with snap-in connection with M10/1 threaded adapter

Rated voltage: 2/250 V

Quantity: N° 100 pieces

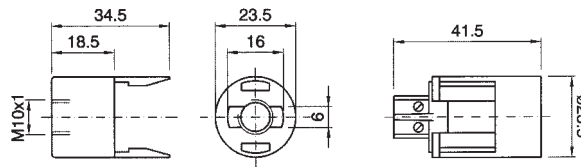

Lampholders with E.40 connection



0135/TP

Diameter: mm. 52


Clamps: brass screw

Fixing: with steel zinc-plated fixing bracket interax mm. 52

Cap: treated slab

Rated voltage: 750 V

Quantity: N° 10 pieces

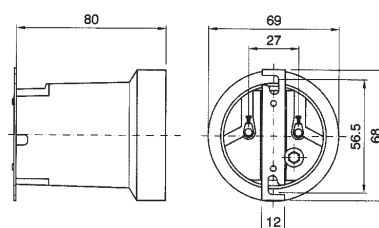


PORTALAMPADE A CANDELA IN TERMOPLASTICO ATTACCO E.14

Lampholders with E.14 connection



1200/BI white coloured
1200/AN old coloured
1200/AV ivory coloured
1200/ANZ aged coloured

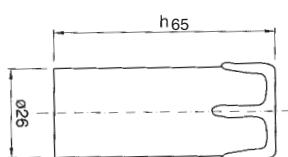


Diameter: mm. 26
Clamps: screw
Fixing: M10/1
Height: mm. 65
Rated voltage: 2/250 V

Quantity: N° 50 pieces

Lampholders with E.14 connection



1201/BI white coloured
1201/AN old coloured
1201/AV ivory coloured
1201/ANZ aged coloured

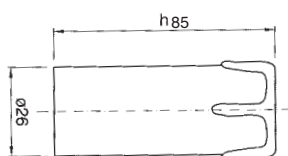


Diameter: mm. 26
Clamps: screw
Fixing: M10/1
Height: mm. 85
Rated voltage: 2/250 V

Quantity: N° 40 pieces

Lampholders with E.14 connection



1202/BI white coloured
1202/AN old coloured
1202/AV ivory coloured
1202/ANZ aged coloured

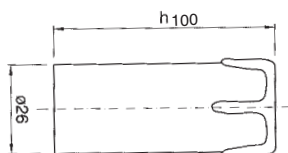

Diameter: mm. 26
Clamps: screw
Fixing: M10/1
Height: mm. 100
Rated voltage: 2/250 V

Quantity: N° 30 pieces

THERMOPLASTIC CANDLE COVERING FOR LAMPHOLDERS WITH E.27 CONNECTION

Candle covering



2201/BI
2201/AN
2201/AV
2201/ANZ


white coloured
old coloured
ivory coloured
aged coloured

Thermoplastic covering for E.27 lampholders (0165 series)

Diameter: mm. 42

Height: mm. 85

Quantity: N° 100 pieces



STEATITE LAMPHOLDERS FOR LOW TENSION HALOGEN LAMPS

Lampholders for halogen lamps



0183

Lampholders with GZ4-G5.3-GX5.3-GX6.35-GZ6.35 connection

Fixing: with passer-by holes for M3 screws


Body: steatite

Cables: 15 cm.

Rated current: 10 A

Rated voltage: 24 V

Quantity: N° 100 pieces

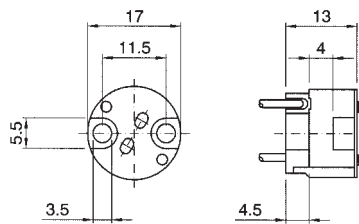

Lampholders for halogen lamps



0183/D

Lampholders with GZ4-G5.3-GX5.3-GX6.35-GZ6.35 connection

Fixing: with steel fixing bracket with passer-by holes \varnothing 3,2 interax mm. 26


Body: steatite

Cables: 15 cm.

Rated current: 10 A

Rated voltage: 24 V

Quantity: N° 100 pieces

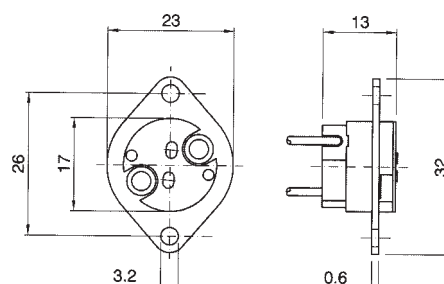


STEATITE LAMPHOLDERS FOR LOW TENSION HALOGEN LAMPS

Lampholders for halogen lamps



0183/M

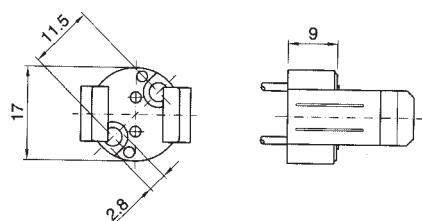


Lampholders with GU5.3 connection
Fixing: with passer-by holes for M3 screws
Body: steatite
Cables: 15 cm.
Rated current: 10 A
Rated voltage: 24 V

Quantity: N° 100 pieces

Lampholders for halogen lamps



0183/R

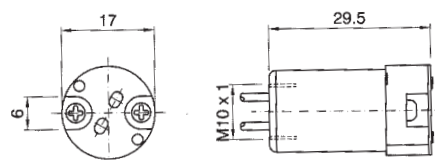


Lampholders with GZ4-G5.3-GX5.3-GX6.35-GZ6.35 connection
Fixing: aluminium support with M10/1 threaded connection
Body: steatite
Cables: 15 cm.
Rated current: 10 A
Rated voltage: 24 V

Quantity: N° 100 pieces

Lampholders for halogen lamps



0183/S

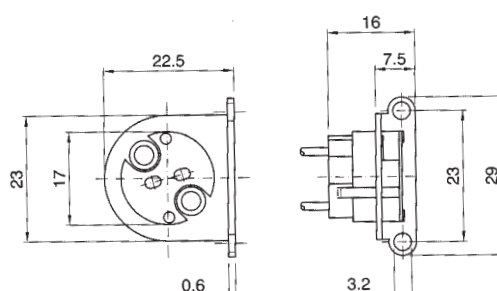

Lampholders with GZ4-G5.3-GX5.3-GX6.35-GZ6.35 connection
Fixing: with steel fixing bracket with passer-by holes Ø 3,2 interax mm. 26
Body: steatite
Cables: 15 cm.
Rated current: 10 A
Rated voltage: 24 V


Quantity: N° 100 pieces

STEATITE LAMPHOLDERS FOR LOW TENSION HALOGEN LAMPS

Lampholders for halogen lamps



0183/V

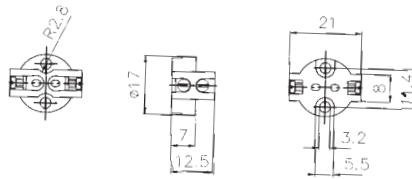

Lampholders with G4-
GZ4-G5.3-GX5.3-
GX6.35-GY6.35-
GZ6.35 connection

Fixing: with passer-by
holes \varnothing 3,2

interax mm. 11,4


Body: steatite

Rated current: 10 A


Rated voltage: 24 V

Quantity: N° 100 pieces

Lampholders for halogen lamps

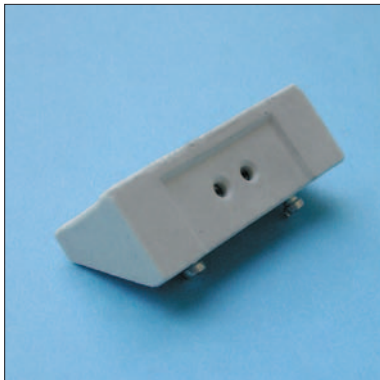

0185

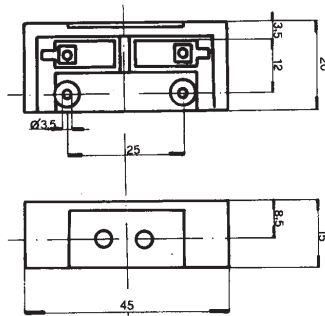

Lampholders with
G6.35-GX6.35-GY6.35-
GZ6.35 connection

Fixing: with passer-by
holes \varnothing 3,2

interax mm. 25

Body: steatite

Rated current: 6 A


Rated voltage: 24 V

Quantity: N° 100 pieces

Lampholders for halogen lamps



0186

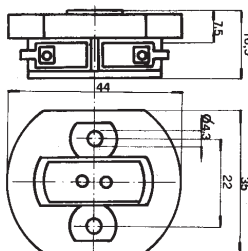

Lampholders with
G6.35-GX6.35-
GY6.35-GZ6.35
connection

Fixing: with passer-by
holes \varnothing 4,3

interax mm. 22

Body: steatite

Rated current: 6 A

Rated voltage: 24 V


Quantity: N° 100 pieces

STEATITE LAMPHOLDERS FOR LOW TENSION HALOGEN LAMPS

Lampholders for halogen lamps



0189

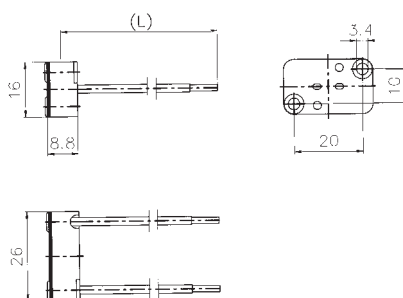


Lampholders with GX5.3-GZ6.35 connection
Fixing: with passer-by holes \varnothing 3,4
Body: steatite
Cables: 15 cm.
Rated current: 8 A
Rated voltage: 24 V
Quantity: N° 100 pieces

THERMOPLASTIC LAMPHOLDERS FOR LOW TENSION HALOGEN LAMPS

Lampholders for halogen lamps



0188

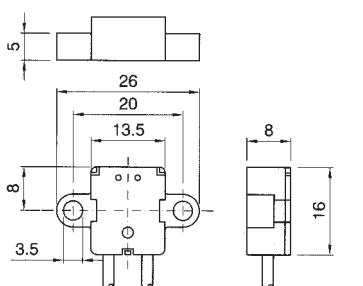


Lampholders with G4 connection
Fixing: with passer-by holes \varnothing 3,2 interax 20 mm.
Body: thermoplastic
Cables: 15 cm.
Rated current: 4 A
Rated voltage: 24 V
Quantity: N° 100 pieces

Lampholders for halogen lamps



0188/R

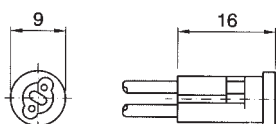


Lampholders with G4 connection
Fixing: joint in cables \varnothing 7,7/7,8
Body: thermoplastic
Cables: 15 cm.
Rated current: 4 A
Rated voltage: 24 V
Quantity: N° 100 pieces

LAMP HOLDERS FOR INCANDESCENT HALOGEN LAMPS FOR NET TENSION WITH R7s CONNECTION

Lampholders with R7s connection



0101

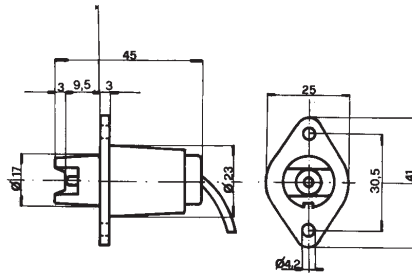


Lampholders with R7s connection
Fixing: with passer-by holes $\varnothing 4,2$
Body: brass-plated die-cast nickel-plated steatite
Cables: 35 cm.
Rated current: 12 A
Rated voltage: 250 V

Quantity: N° 20 pairs

Lampholders with R7s connection



0102

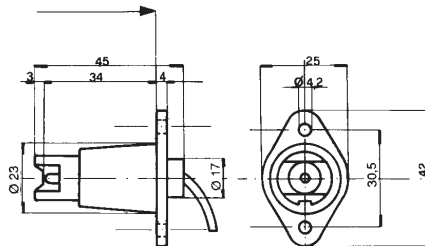

Lampholders with R7s connection
Fixing: with passer-by holes $\varnothing 4,2$
Body: brass-plated die-cast nickel-plated steatite
Cables: 35 cm.
Rated current: 12 A
Rated voltage: 250 V

Quantity: N° 20 pairs

Lampholders with R7s connection



0459



Lampholders with R7s connection
Fixing: with passer-by holes $\varnothing 4$
Body: die-cast aluminium
Cables: 25 cm.
Rated current: 10 A
Rated voltage: 250 V

Quantity: N° 20 pairs


LAMP HOLDERS FOR INCANDESCENT HALOGEN LAMPS FOR NET TENSION WITH R7s CONNECTION

Lampholders with R7s connection



0460

500 W = 171,5
1000 W = 239,5
1500 W = 307,5

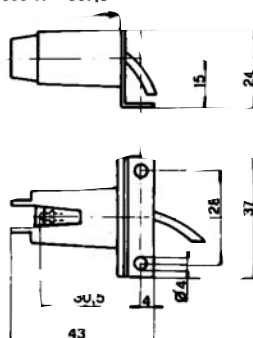


Lampholders with R7s connection
Fixing: metal plate 90° with passer-by holes Ø 4 interax 28 mm.
Body: die-cast aluminium
Cables: 25 cm.
Rated current: 10 A
Rated voltage: 250 V
Quantity: N° 20 pairs

Lampholders with R7s connection



0103

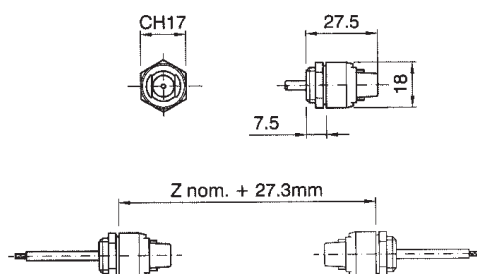


Lampholders with R7s connection
Fixing: with nut
Body: steatite with treated brass envelope
Cables: 25 cm.
Rated current: 6 A
Rated voltage: 250 V
Quantity: N° 20 pairs

Lampholders with R7s connection



1106

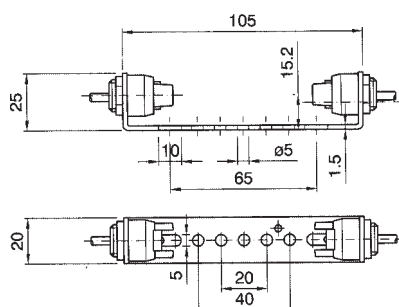


Lampholders with R7s connection for Z. lamps nom. 74,9 mm.
Fixing: with steel fixing bracket with passer-by holes Ø 4,2
Body: steatite with treated brass envelope
Cables: 25 cm.
Rated current: 6 A
Rated voltage: 250 V
Quantity: N° 40 pieces

LAMP HOLDERS FOR INCANDESCENT HALOGEN LAMPS FOR NET TENSION WITH R7s CONNECTION

Lampholders with R7s connection



1107

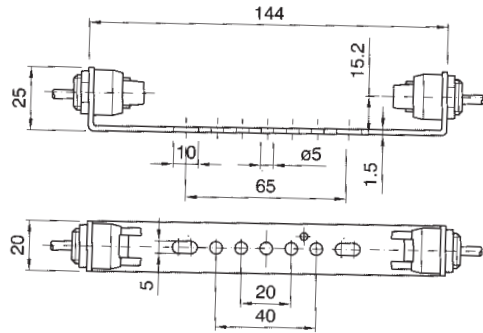

Lampholders with R7s connection for Z. lamps nom. 114,2 mm.

Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2

Body: steatite with treated brass envelope

Cables: 25 cm.

Rated current: 6 A


Rated voltage: 250 V

Quantity: N° 30 pieces

Lampholders with R7s connection



0184

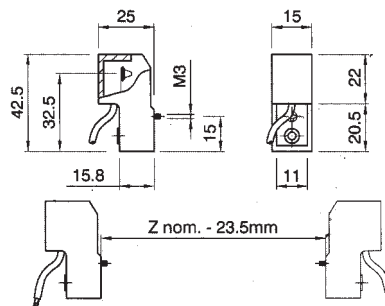

Lampholders with R7s connection

Fixing: with M3 screw

Body: steatite


Cables: 25 cm.

Rated current: 6 A


Rated voltage: 250 V

Quantity: N° 20 pairs

Lampholders with R7s connection

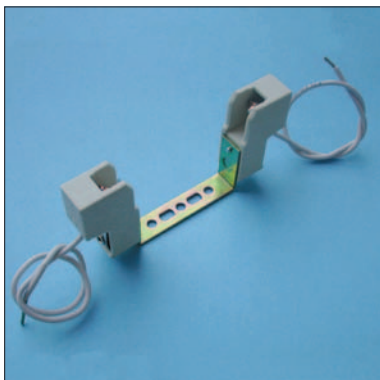

1183

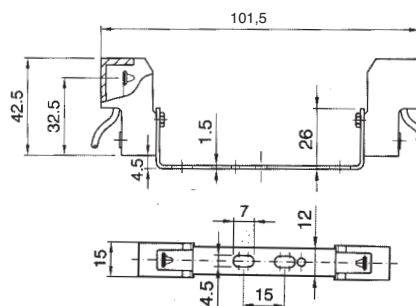

Lampholders with R7s connection for Z. lamps nom. 74,9 mm.

Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2

Body: steatite

Cables: 25 cm.


Rated current: 6 A

Rated voltage: 250 V


Quantity: N° 40 pieces

LAMP HOLDERS FOR INCANDESCENT HALOGEN LAMPS FOR NET TENSION WITH R7s CONNECTION

Lampholders with R7s connection

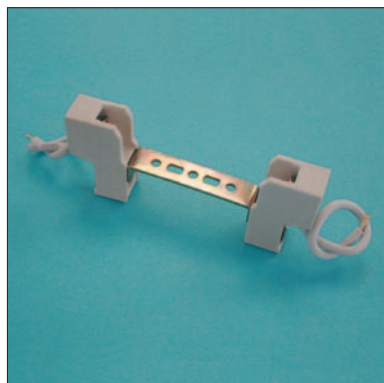

1183/SG

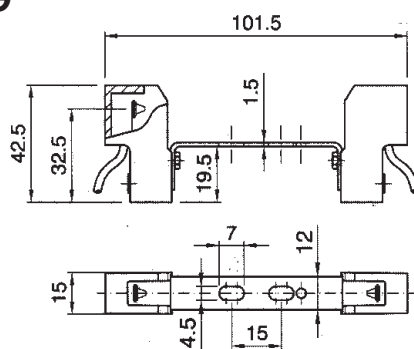

Lampholders with R7s connection for Z. lamps nom. 74,9 mm.

Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2

Body: steatite


Cables: 25 cm.

Rated current: 6 A


Rated voltage: 250 V

Quantity: N° 40 pieces

Lampholders with R7s connection

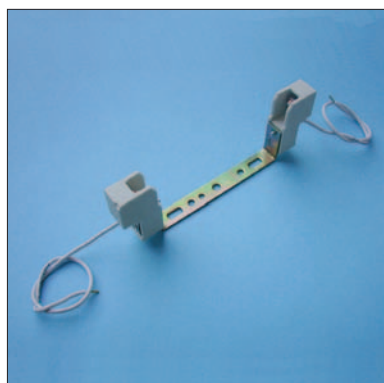

1184

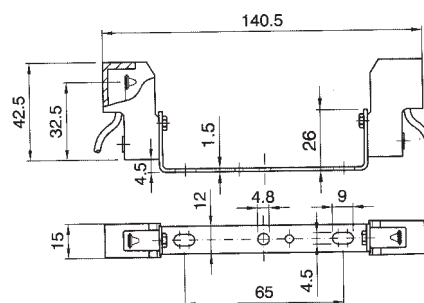

Lampholders with R7s connection for Z. lamps nom. 114,2 mm.

Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2

Body: steatite

Cables: 25 cm.

Rated current: 6 A


Rated voltage: 250 V

Quantity: N° 30 pieces

Lampholders with R7s connection



1184/SG

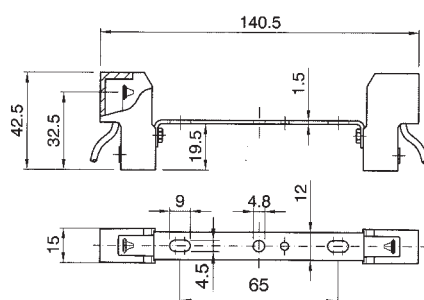

Lampholders with R7s connection for Z. lamps nom. 114,2 mm.

Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2

Body: steatite

Cables: 25 cm.

Rated current: 6 A

Rated voltage: 250 V


Quantity: N° 30 pieces

LAMP HOLDERS FOR INCANDESCENT HALOGEN LAMPS FOR NET TENSION AND ACCESSORIES

Lampholders with GZ10-GU10 connection



1140

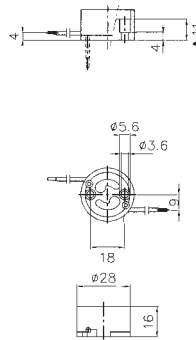

Lampholders with GZ10/GU10 connection

Fixing: with passer-by holes \varnothing 3,5

Body: steatite

Cables: 25 cm.

Rated current: 2 A


Rated voltage: 250 V

Quantity: N° 50 pieces

Lampholders with G9 connection



1160

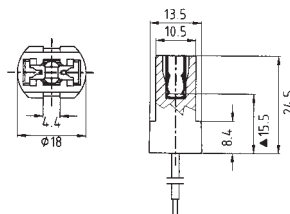

Lampholders with G9 connection

Fixing: see accessories

Body: steatite

Cables: 25 cm.

Rated current: 2 A


Rated voltage: 250 V

Quantity: N° 50 pieces


Accessories for 1160 article



1160/S

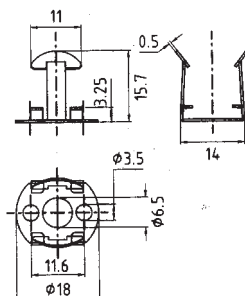

1160/M10

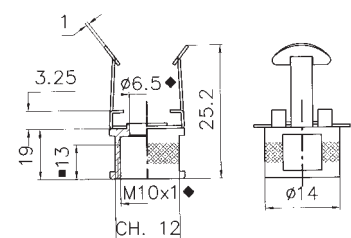


LAMP HOLDERS FOR DISCHARGE LAMPS WITH RX7s CONNECTION

Lampholders with RX7s connection



0103/RX

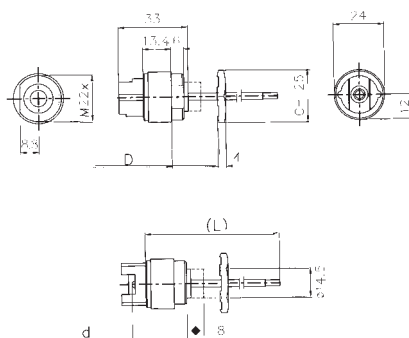


Lampholders with RX7s connection

Fixing: with nut
Body: statite with treated brass envelope
Cables: 25 cm.
Rated current: 6 A
Rated voltage: 1000 V
Quantity: N° 20 pairs

Lampholders with RX7s connection



1106/RX

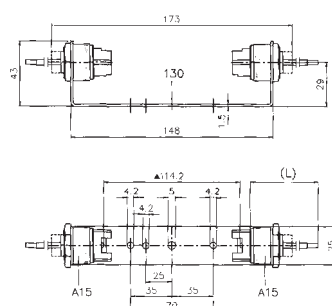


Lampholders with RX7s connection for Z. lamps nom. 114,2 mm.

Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2
Body: statite with treated brass envelope
Cables: 25 cm.
Rated current: 6 A
Rated voltage: 1000 V
Quantity: N° 40 pieces

Lampholders with RX7s connection



1107/RX

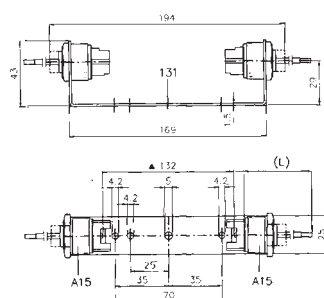


Lampholders with RX7s connection for Z. lamps nom. 132 mm.


Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2
Body: statite with treated brass envelope
Cables: 25 cm.
Rated current: 6 A
Rated voltage: 1000 V
Quantity: N° 30 pieces

LAMP HOLDERS FOR DISCHARGE LAMPS WITH RX7s CONNECTION

Lampholders with RX7s connection

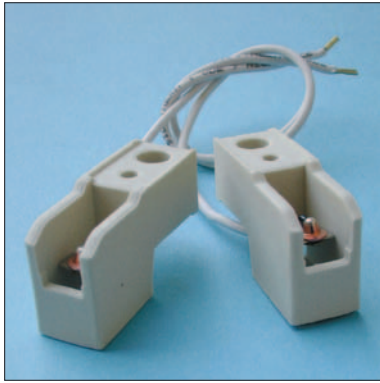

0184/RX

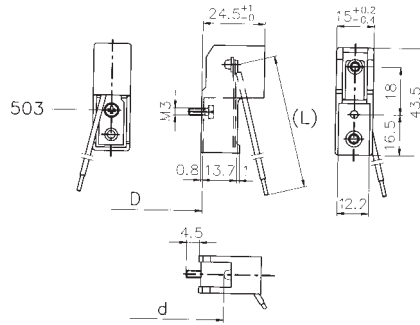

Lampholders with RX7s connection

Fixing: with M3 screw

Body: steatite


Cables: 25 cm.

Rated current: 6 A


Rated voltage: 1000 V

Quantity: N° 20 pairs

Lampholders with RX7s connection

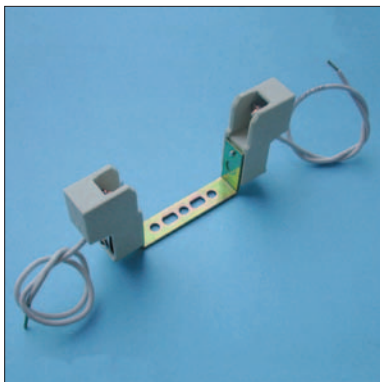

1183/RX

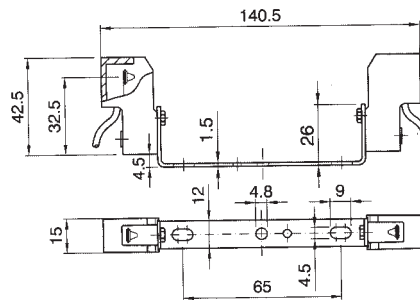

Lampholders with RX7s connection for Z. lamps nom. 114,2 mm.

Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2

Body: steatite


Cables: 25 cm.

Rated current: 6 A


Rated voltage: 1000 V

Quantity: N° 40 pieces

Lampholders with RX7s connection

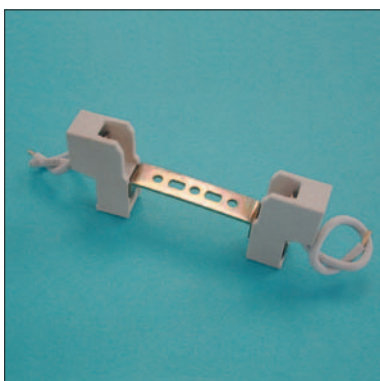

1183/SGRX

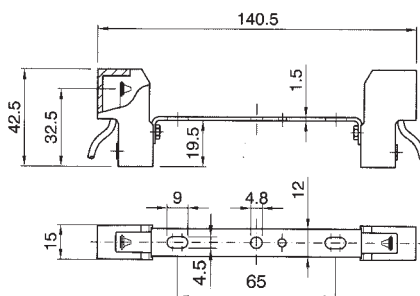

Lampholders with RX7s connection for Z. lamps nom. 114,2 mm.

Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2

Body: steatite

Cables: 25 cm.


Rated current: 6 A

Rated voltage: 1000 V


Quantity: N° 40 pieces

LAMPHOLDERS FOR DISCHARGE LAMPS WITH RX7s CONNECTION

Lampholders with RX7s connection

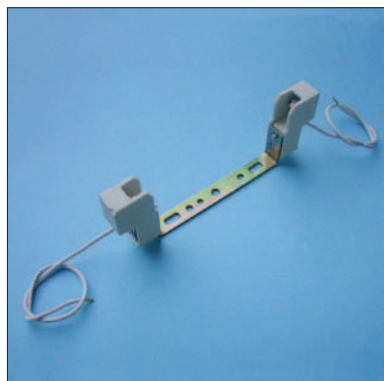

1184/RX

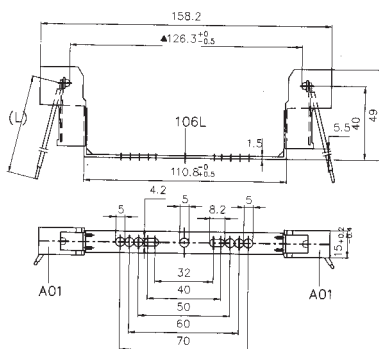

Lampholders with RX7s connection for Z. lamps nom. 132 mm.

Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2

Body: steatite


Cables: 25 cm.

Rated current: 6 A


Rated voltage: 1000 V

Quantity: N° 30 pieces

Lampholders with RX7s connection

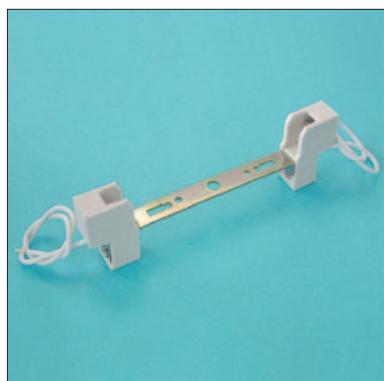

1184/SGRX

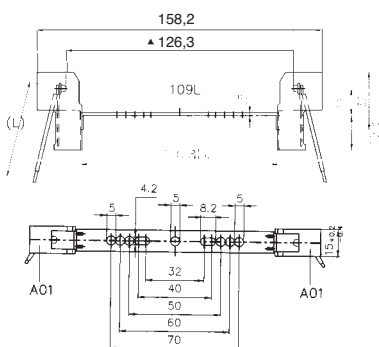

Lampholders with RX7s connection for Z. lamps nom. 132 mm.

Fixing: with steel fixing bracket with passer-by holes \varnothing 4,2

Body: steatite

Cables: 25 cm.

Rated current: 6 A

Rated voltage: 1000 V

Quantity: N° 30 pieces


Other cables and brackets with similar features to value upon demand

LAMPHOLDERS WITH GX16D (PAR 56) CONNECTION

Lampholders with GX16D connection



9901

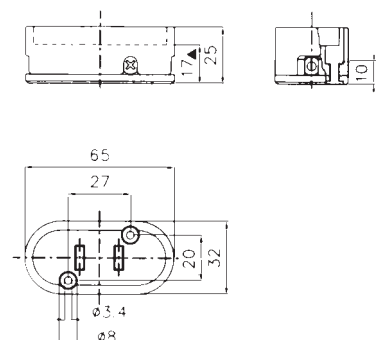

Lampholders with GX16D connection

Fixing: with passer-by holes \varnothing 3,2

interax 33,6 mm.

Body: porcelain

Rated current: 10 A

Rated voltage: 250 V


Quantity: N° 50 pieces

LAMP HOLDERS FOR DISCHARGE LAMPS WITH PG12-G12 CONNECTION

Lampholders with PG12/1 connection



4211

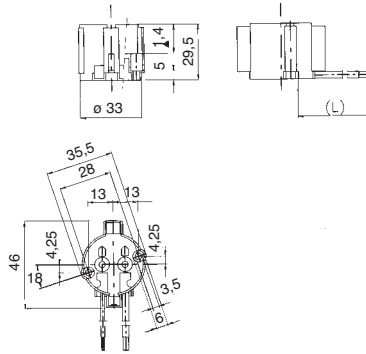


Lampholders with PG12/1 connection
Fixing: with passer-by holes $\varnothing 3,2$ interax 28 mm.
Body: black PPS
Cables: 25 cm.
Rated current: 2 A
Rated voltage: 1000 V

Quantity: N° 50 pieces

Lampholders with PG12/2 connection



4212

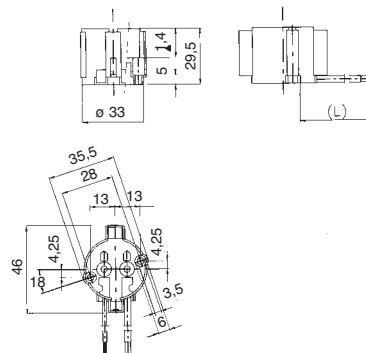


Lampholders with PG12/2 connection
Fixing: with passer-by holes $\varnothing 3,2$ interax 28 mm.
Body: black PPS
Cables: 25 cm.
Rated current: 2 A
Rated voltage: 1000 V

Quantity: N° 50 pieces

Lampholders with G12 connection



4213

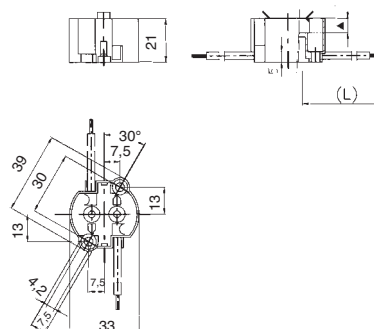

Lampholders with G12 connection
Fixing: with passer-by holes $\varnothing 3,2$ interax 30 mm.
Body: black PPS
Cables: 25 cm.
Rated current: 2 A
Rated voltage: 1000 V


Quantity: N° 50 pieces

LAMP HOLDERS FOR DISCHARGE LAMPS WITH G12-G8.5-FC2 CONNECTION

Lampholders with G12 connection



4214

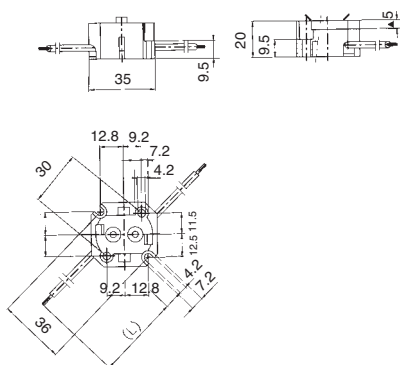


Lampholders with G12 connection
Fixing: with passer-by holes $\varnothing 4,2$ interax 36 mm.
Body: porcelain
Cables: 25 cm.
Rated current: 2 A
Rated voltage: 1000 V
Quantity: N° 50 pieces

Lampholders with G8.5 connection



4215

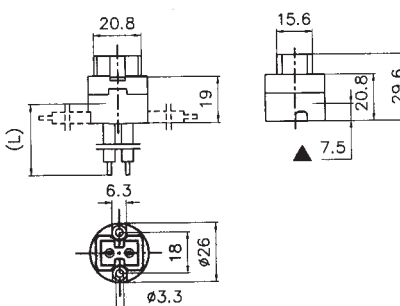


Lampholders with G8.5 connection
Fixing: with passer-by holes $\varnothing 3,2$ interax 18 mm.
Body: steatite
Cables: 25 cm.
Rated current: 2 A
Rated voltage: 750 V
Quantity: N° 50 pieces

Lampholders with FC2 connection




4216

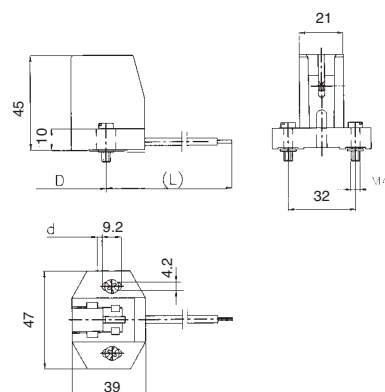


Lampholders with FC2 connection
Fixing: with oval passer-by holes $\varnothing 4,2 \times 9,2$ interax 32 mm.
Body: porcelain
Cables: 25 cm.
Rated current: 8 A
Rated voltage: 1000 V
Quantity: N° 20 pairs

LAMPHOLDERS FOR FLUORESCENT LAMPS WITH G13 CONNECTION

Lampholders with G13 connection

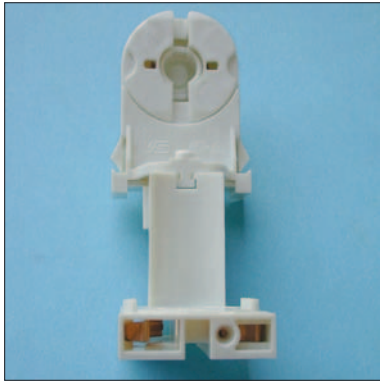

9207

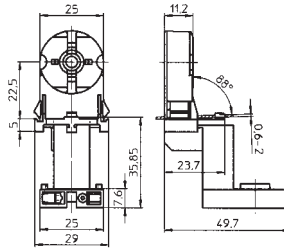


Lampholders with G13 connection for T lamps
Ø 26


Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 100 pieces

Lampholders with G13 connection

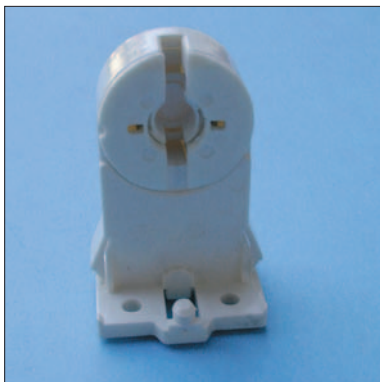

9262

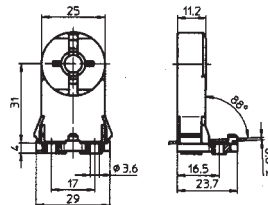


Lampholders with G13 connection for T lamps
Ø 26 e Ø 38


Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 100 pieces

Lampholders with G13 connection

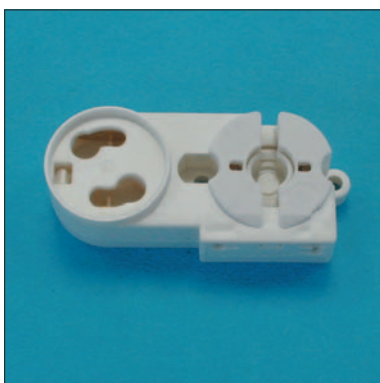

9208

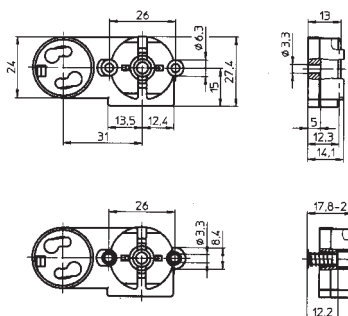


Lampholders with G13 connection for T lamps
Ø 26 e Ø 38

Rated current: 2 A
Rated voltage: 250 V


Quantity: N° 100 pieces

LAMP HOLDERS FOR FLUORESCENT LAMPS WITH G13-2G10-2G11 CONNECTION

Lampholders with G13 connection

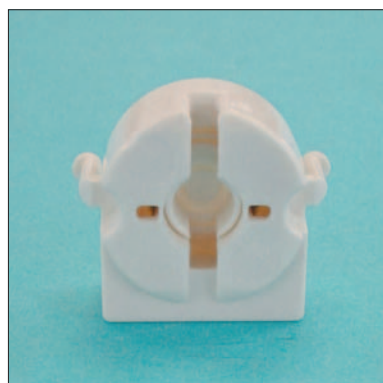

9263

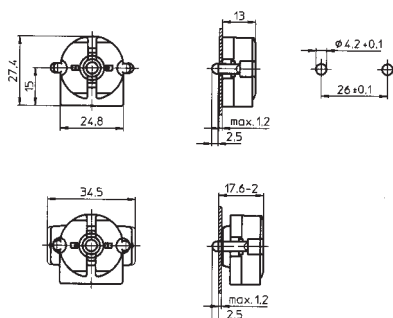


Lampholders with G13 connection for T lamps
 $\varnothing 26$ e $\varnothing 38$


Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 100 pieces

Lampholders with 2G10 connection

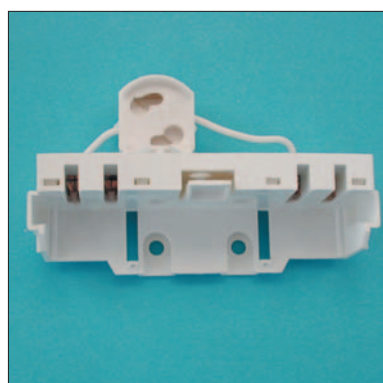

9231

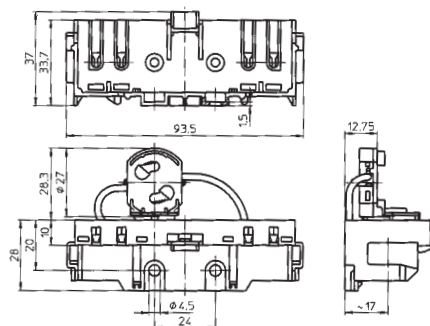

Lampholders with 2G10 connection for TC-F18,
 24 e 36 W lamps


Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 50 pieces

Lampholders with 2G11 connection



9241

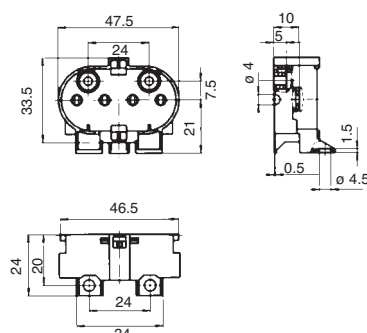

Lampholders with 2G11 connection for TCL 18,
 24, 34, 36, 40 e 55 W lamps

Rated current: 2 A
Rated voltage: 250 V


Quantity: N° 50 pieces

LAMP HOLDERS FOR FLUORESCENT LAMPS WITH G5 CONNECTION

Lampholders with G5 connection



9279

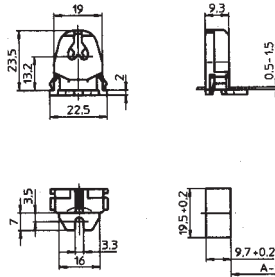

Lampholders with G5 connection for T5 lamps
Ø 16

Rated current: 2 A
Rated voltage: 250 V


Quantity: N° 100 pieces

STARTERHOLDER

Starterholder



9305

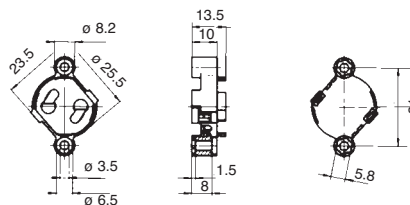


Thermoplastic starterholder with snap-in connection contacts

Quantity: N° 100 pieces

Starterholder



9306

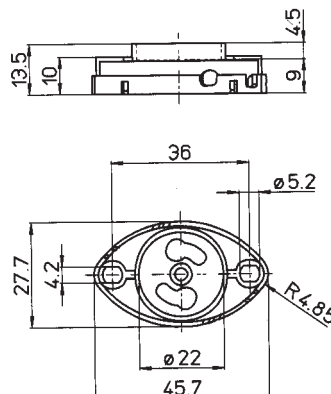

Thermoplastic starterholder with fixing wings Ø 4,2 interax 36 mm.


Quantity: N° 100 pieces

LAMP HOLDERS FOR FLUORESCENT LAMPS WITH G10Q-G23 CONNECTION

Lampholders with G10Q connection



9222

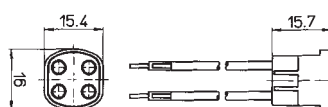

Lampholders with G10Q connection with 20 cm. cables for circline


Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 50 pieces

Lampholders with G10Q connection




9223

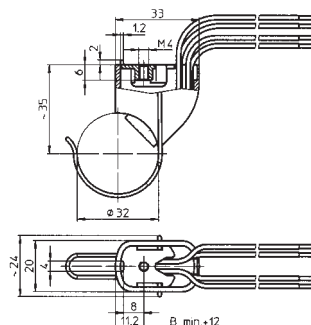


Lampholders with G10Q connection for T-R lamps, with steel supporting spring \varnothing 32
Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 50 pieces

Lampholders with G23 connection

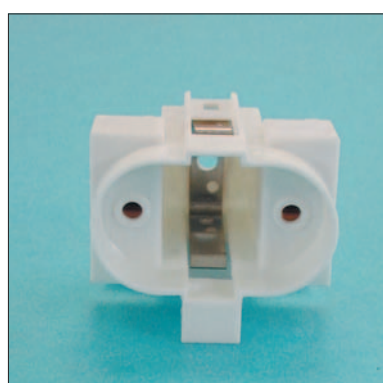

9501

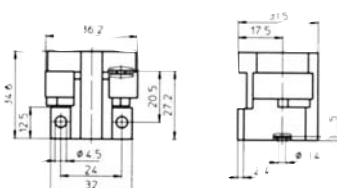

Lampholders with G23 connection for TC-S lamps

Fixing: with passer-by holes \varnothing 4,2
interax 24 mm.

Rated current: 2 A
Rated voltage: 250 V


Quantity: N° 50 pieces

LAMPHOLDERS FOR FLUORESCENT LAMPS WITH G24D1-G24Q1 CONNECTION AND ACCESSORIES

Lampholders with G24D1 connection



9405

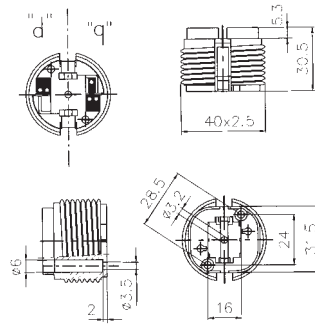


Lampholders with G24D1 connection for 10-13W lamps
Fixing: with passer-by holes $\varnothing 3,5$ interax 24 mm.
Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 30 pieces

Lampholders with G24Q1 connection




9406

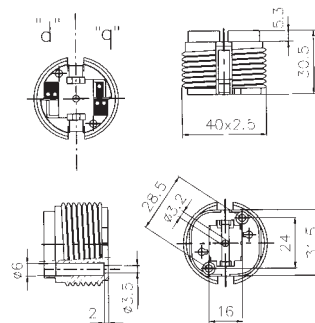


Lampholders with G24Q1 connection for 10-13W lamps
Fixing: with passer-by holes $\varnothing 3,5$ interax 24 mm.
Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 30 pieces


Accessories for 9405 e 9406 articles

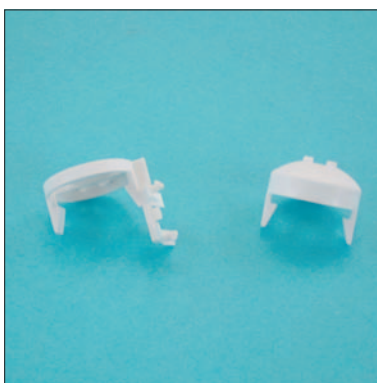

9407



9408



GUIDING-SLIT SWITCHES

Guiding-slit switches




1190
1190/N
1190/M
1190/OR
1190/ARG

white coloured
black coloured
brown coloured
gold coloured
silvery coloured

Single pole equalizer switch
Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 100 pieces

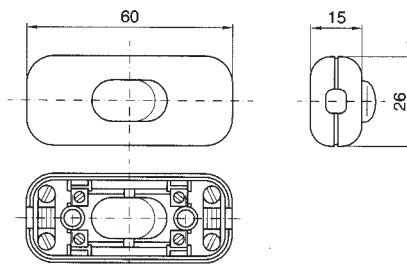

Guiding-slit switches




2190
2190/N
2190/M
2190/OR

white coloured
black coloured
brown coloured
gold coloured

Two poles equalizer switch
Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 100 pieces

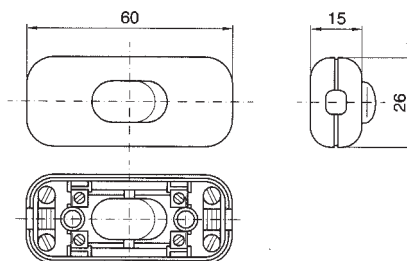

Guiding-slit switches



0204
0204/N

white coloured
black coloured

Two poles equalizer switch
Rated current: 12 A
Rated voltage: 250 V

Quantity: N° 30 pieces


PEDAL SWITCHES

Pedal switch



0236
0236/N

white coloured
black coloured



Single pole pedal switch
Rated current: 2 A
Rated voltage: 250 V


Quantity: N° 25 pieces

Pedal switch



0237
0237/N
0237/OR

white coloured
black coloured
gold coloured

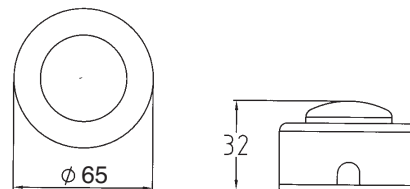

Single pole pedal switch
Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 25 pieces

Light variation



0207
0207/N
0207/OR

white coloured
black coloured
gold coloured


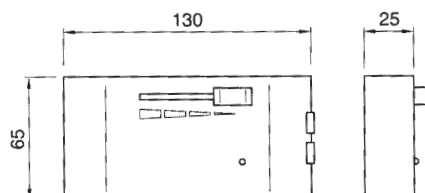


Table or ground light variation from 60 W to 500 W incandescent lamps, with individuation led in the dark
Rated voltage: 230 V

SWITCHES

Pole button switch

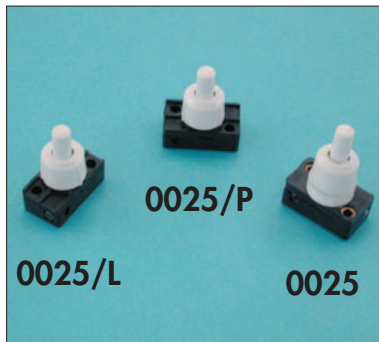


0025
0025/L
0025/P

neck 8 mm.
neck 12 mm.
neck 8 mm. (switch)

Thermoplastic single pole button switch
Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 100 pieces

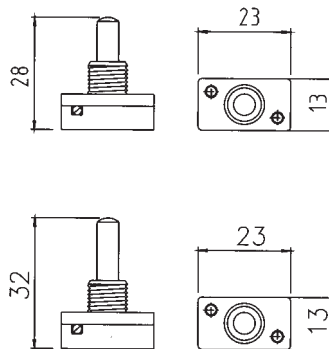


Pole button switch




0025/T
0025/TP

Thermoplastic single pole tie switch
Rated current: 2 A
Rated voltage: 250 V

Quantity: N° 100 pieces

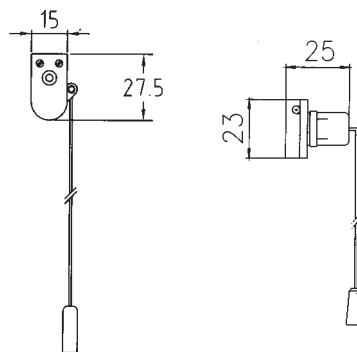

Door contact

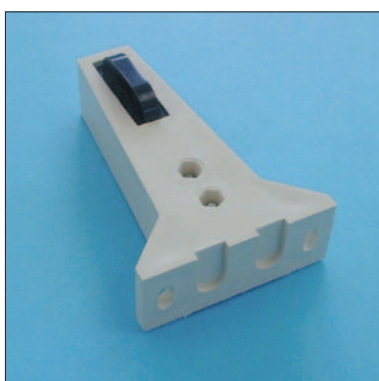

0107

Door contact with cover protection. Phosphorous bronze swings, completely golden contacts, insulated from the outside also for any fortuitous contact

Size: 100x65


Height: mm. 25

Fixing centre distance: mm. 50

Quantity: N° 25 pieces

LEVER SWITCHES

Single pole lever switch

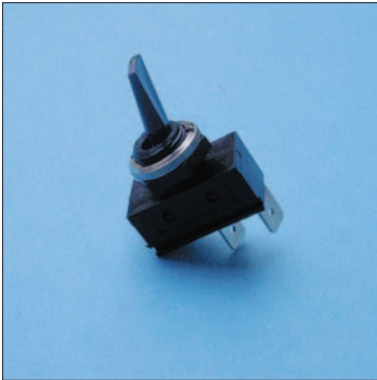


1700/H

Function: 0/1
nylon lever: mm. 17.8
Rated current: 16 A
Rated voltage: 230 V

Quantity: N° 100 pieces

Two poles lever switch

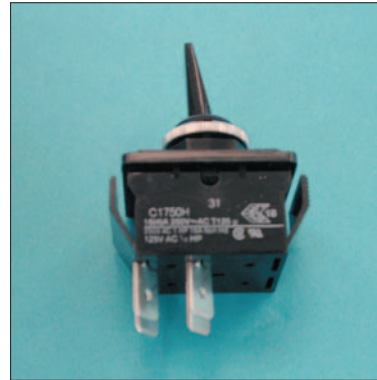

1750/H

Function: 0/1
nylon lever: mm. 17.8
Rated current: 16 A
Rated voltage: 230 V

Quantity: N° 50 pieces

Single pole lever switch




1710/H

Function: 1/2 lever
nylon lever: mm. 17.8
Rated current: 16 A
Rated voltage: 230 V

Quantity: N° 100 pieces

Two poles lever switch

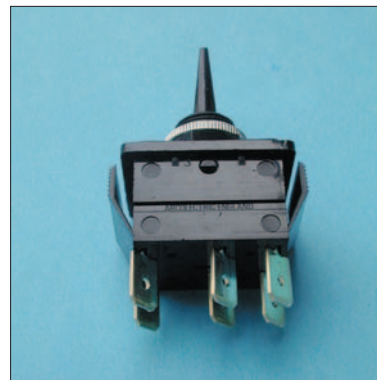


1760/H

Function: 1/2 lever
nylon lever: mm. 17.8
Rated current: 16 A
Rated voltage: 230 V

Quantity: N° 50 pieces

Single pole lever switch

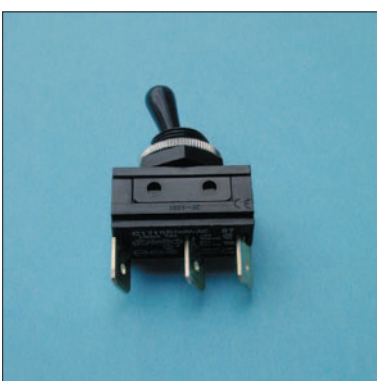


1720/H

Function: 1/0/2
nylon lever: mm. 17.8
Rated current: 16 A
Rated voltage: 230 V

Quantity: N° 100 pieces

Two poles lever switch

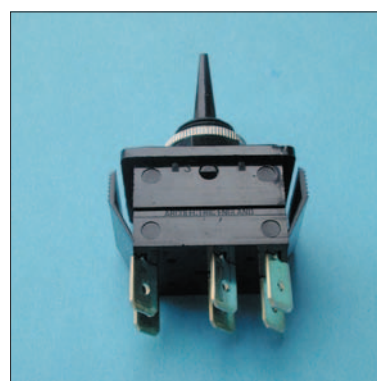

1770/H

Function: 1/0/2
nylon lever: mm. 17.8
Rated current: 16 A
Rated voltage: 230 V

Quantity: N° 50 pieces

SPIRAL CABLES



Article	Colour	Section cable mm.	Length cable mt.	Length closed cable cm.
2032	white	2 x 0,50	3	33
2032/N	black	2 x 0,50	3	33
2033	white	2 x 0,50	5	64
2033/N	black	2 x 0,50	5	64
2034	white	2 x 0,75	3	35
2034/N	black	2 x 0,75	3	35
2035	white	2 x 0,75	5	68
2035/N	black	2 x 0,75	5	68
2012	white	3 x 0,75	3	40
2012/N	black	3 x 0,75	3	40
2013	white	3 x 0,75	5	73
2013/N	black	3 x 0,75	5	73
2014	white	3 x 0,75	10	135
2014/N	black	3 x 0,75	10	135
2015	white	3 x 0,75	15	200
2015/N	black	3 x 0,75	15	200
2022	white	3 x 1	3	42
2022/N	black	3 x 1	3	42
2023	white	3 x 1	5	77
2023/N	black	3 x 1	5	77
2024	white	3 x 1	10	144
2024/N	black	3 x 1	10	144
2025	white	3 x 1	15	214
2025/N	black	3 x 1	15	214

CABLES




3021/200
3021/N/200
3021/OR/200

white coloured
 black coloured
 gold coloured

3021/150
3021/N/150
3021/OR/150

white coloured
 black coloured
 gold coloured

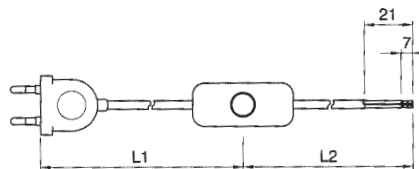

Two poles cables with flat cable of cm. 200 with european plug L1 120 cm. L2 80 cm.


Two poles cables with flat cable of cm. 150 with european plug L1 100 cm. L2 50 cm.

Quantity: N° 25 pieces



3031
3031/N
3031/OR

white coloured
 black coloured
 gold coloured

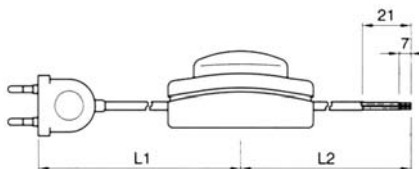

Two poles cables with flat cable of cm. 300 with pedal switch and european plug L1 100 cm. L2 200 cm.


Quantity: N° 25 pieces

PENDENT



3011
3011/N
3011/OR

white coloured
 black coloured
 gold coloured

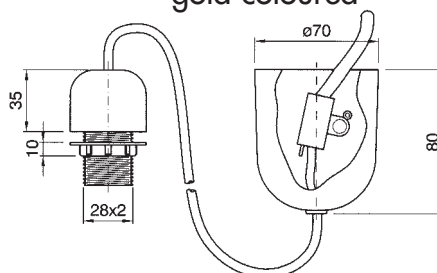

Pendent with cm. 80 cable and lampholder with E.27 connection

Quantity: N° 25 pieces


CEILING-ROSE



0157
0157/N
0157/OR

white coloured
black coloured
gold coloured


Hanging-up
thermoplastic ceiling-
rose

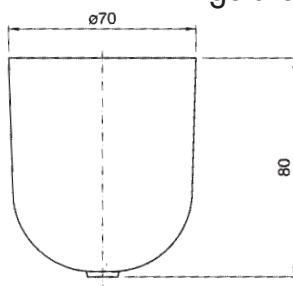

1157
1157/N
1157/OR

white coloured
black coloured
gold coloured


Hanging-up
thermoplastic ceiling-
rose

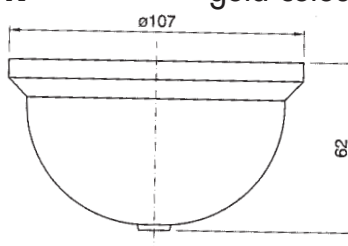

2157
2157/N
2157/OR

white coloured
black coloured
gold coloured


Hanging-up
thermoplastic ceiling-
rose

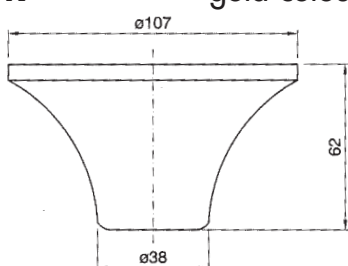

3157
3157/N
3157/OR


white coloured
black coloured
gold coloured

Hanging-up
thermoplastic ceiling-
rose

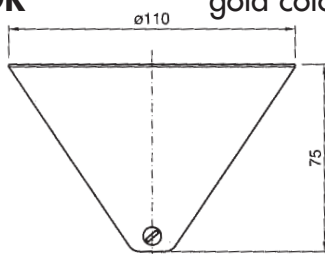

HOOKS AND CABLE-CLAMPS

Hook

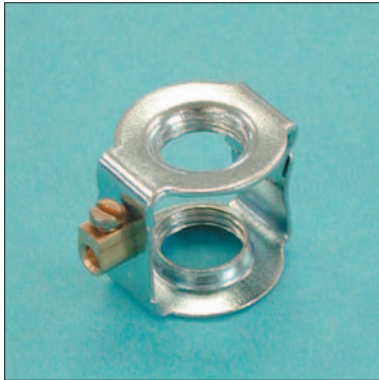

0230

Hook for chandelier with ground clamp, M10/1 "female" connection

Hook



0238

Pulley hook with M10/1 "female" connection

Hook



0239

Suspension cap with pulley, 3/8" gas "female" connection

Hook



0240

Hook with internal passer-by hole, 3/8" gas "male" connection

Hook



0241

Hook with passer-by hole with M10/1 nut

Cable-clamp



0232 white
0232/N black
0232/OR gold


Cable-clamp for round/circle cables, H mm. 15, with M10/1 "male" threaded

ACCESSORIES FOR ILLUMINATION



0330/OT Brass sleeve for tige, M10X1 connection

0330/C Chrome sleeve for tige, M10X1 connection

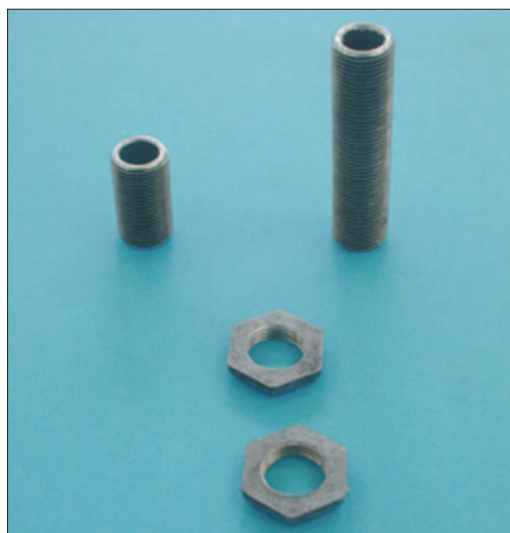

0217 Aluminium die-cast nipple, 3/8" gas connection length mm. 30

0218 Aluminium die-cast nipple, 3/8" gas connection length mm. 50

0219 Aluminium die-cast nipple, 3/8" gas connection length mm. 70


0220 Aluminium die-cast nipple, 3/8" gas connection length mm. 100

0221 Aluminium die-cast nipple, 3/8" gas connection length mm. 120

0222 Aluminium die-cast nipple, 3/8" gas connection length mm. 150

0223 Aluminium die-cast nipple, 3/8" gas connection length mm. 200

0224 Die-cast aluminium shaped nut, 3/8" gas connection

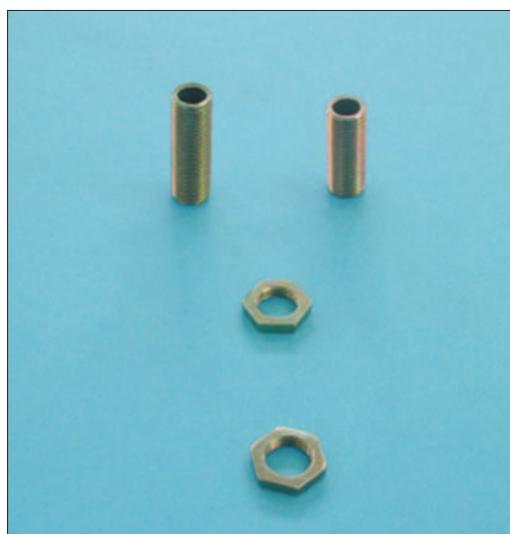

0225 Metal nipple, M10x1 connection - length mm. 15

0226 Metal nipple, M10x1 connection - length mm. 20

0227 Metal nipple, M10x1 connection - length mm. 25

0228 Metal nipple, M10x1 connection - length mm. 30

0228/4 Metal nipple, M10x1 connection - length mm. 40

0228/5 Metal nipple, M10x1 connection - length mm. 50

0228/10 Metal nipple, M10x1 connection - length mm. 100

0228/15 Metal nipple, M10x1 connection - length mm. 150

0228/20 Metal nipple, M10x1 connection - length mm. 200

0228/30 Metal nipple, M10x1 connection - length mm. 300

0228/50 Metal nipple, M10x1 connection - length mm. 500

0228/100 Metal nipple, M10x1 connection - length mm. 1000

0229 Metal shaped nut, M10x1 connection

DIFFERENT LENGTHS AVAILABLE

VARIOUS PLIERS

Plier for charging-battery



0121

Insulated grips in plastic material, red or black

Type: from 40 amp.

Leight: mm. 80

Quantity: N°100 pieces

Plier for charging-battery



0122

Insulated grips in plastic material, red or black

Type: from 60 amp.

Leight: mm. 125

Quantity: N°50 pieces

Plier for charging-battery



0122/80

Insulated grips in plastic material, red or black

Type: from 80 amp.

Leight: mm. 145

Quantity: N°30 pieces

Plier for charging-battery



0123

Insulated grips in plastic material, red or black

Type: from 120 amp.

Leight: mm. 175

Quantity: N°10 pieces

Plier for charging-battery



0123/200

Insulated grips in plastic material, red or black

Type: from 200 amp.

Leight: mm. 200

Quantity: N°10 pieces

Plier for charging-battery



0109

Insulated grips in plastic material, red or black

Type: from 400 amp.

Leight: mm. 200

Quantity: N°10 pieces

VARIOUS PLIERS

Crocodile plier



0112

In treated iron with
burr 6 amp.

Diameter: mm. 4

Quantity: N°100 pieces

Crocodile plier




0115

In treated iron with
burr 6 amp.
with insulated grips
in plastic material,
red or black

Diameter: mm. 4

Quantity: N°100 pieces

American plier

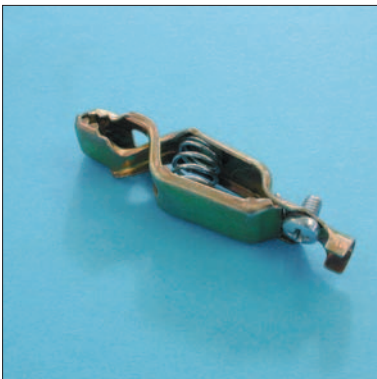

0116

With steel spring and
fixing screw for
conductor 15 amp.

Quantity: N°100 pieces

Protection sheathing



0117

For 0116 article

Colours: Red - Black

STEATITE TERMINALS

SINGLE POLE



7240 Single pole 6A - dim.: mm. 10x18x15 h. mm² 4 N° **300** pieces

7241 Single pole 10A - dim.: mm. 10x25x18.5 h. mm² 6 N° **250** pieces

7242 Single pole 20A - dim.: mm. 11x26x20.5 h. mm² 10 N° **200** pieces

7243 Single pole 30A - dim.: mm. 15x32.4x23 h. mm² 16 N° **100** pieces

TWO POLES




7244 Two poles 6A - dim.: mm. 17x22x15 h. mm² 4 N° **200** pieces

7245 Two poles 10A - dim.: mm. 25x22x18.5 h. mm² 6 N° **120** pieces

7246 Two poles 20A - dim.: mm. 26x24x20.5 h. mm² 10 N° **90** pieces

7247 Two poles 30A - dim.: mm. 32,4x30x23 h. mm² 16 N° **50** pieces

THREE POLES

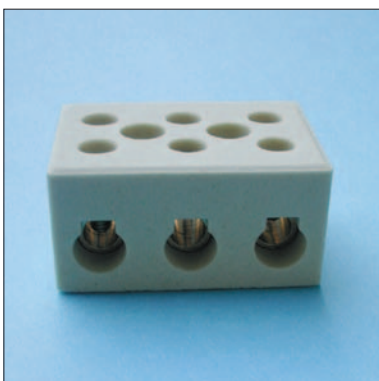

7248 Three poles 10A - dim.: mm. 25x34x18.5 h. mm² 6 N° **75** pieces

7249 Three poles 20A - dim.: mm. 26x37x20.5 h. mm² 10 N° **70** pieces

7251 Three poles 30A - dim.: mm. 32,4x45x23 h. mm² 16 N° **32** pieces

STEATITE TERMINALS

FOUR POLES



7252 Four poles 30A - dim.: mm. 28x60x20 h. mm² 16 N° **35** pieces

75 AMPERE

TWO POLES




0422 Two poles 75A - dim.: mm. 46x28x27 h. mm² 25 N° **50** pieces

THREE POLES



0423 Three poles 75A - dim.: mm. 55x45x22 h. mm² 25 N° **30** pieces

STEEL AND COPPER NORMAL CLOSING COLLARS

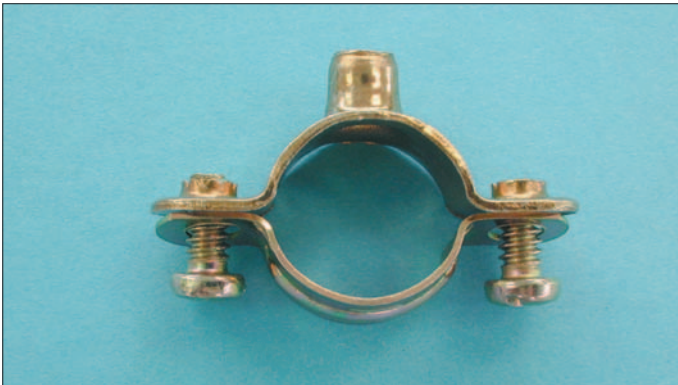

ART.	Ø int. mm.	pz.	ART.	Ø int. mm.	pz.
1002	8	100	1013	26	100
1003	10	100	1014	28	100
1004	12	100	1015	30	100
1005	13	100	1016	32	100
1006	14	100	1017	35	100
1007	16	100	1018	38	100
1008	18	100	1019	42	50
1009	19	100	1020	48	50
1010	20	100	1021	50	25
1011	22	100	1022	60	25
1012	24	100			

For the copper articles,
add the letter "R"

CONSTRUCTIVE FEATURES:

In passive zinc-plated steel - Threaded 6MA

HEAVY HOOKES



ART.	Ø int. mm.	pz.	ART.	Ø int. mm.	pz.
2001	10	100	2006	26	100
2002	13	100	2007	28	100
2003	16	100	2008	32	100
2004	19	100	2009	38	100
2005	22	100	2010	50	50

CONSTRUCTIVE FEATURES:

In passive zinc-plated - Steel thickness: from 1.3 to 2 mm.
Slot: from Ø 10 to Ø 26 mm. 12 x 6.2
from Ø 28 to Ø 50 mm. 13 x 6.8

LIGHT HOOKES



ART.	Ø int. mm.	pz.	ART.	Ø int. mm.	pz.
2054	6	100	2061	14	100
2055	7	100	2062	16	100
2056	8	100	2063	19	100
2057	9	100	2064	20	100
2058	10	100	2065	22	100
2059	12	100	2067	26	100
2060	13	100			

CONSTRUCTIVE FEATURES:

In passive zinc-plated - Steel thickness: from 1 to 1.5 mm.
Slot: 7 x 5 mm.

CAVALLOTTI



ART.	Ø int. mm.	pz.	ART.	Ø int. mm.	pz.
2101	10	100	2106	26	100
2102	13	100	2107	28	100
2103	16	100	2108	32	100
2104	19	100	2109	38	100
2105	22	100	2110	50	50


CONSTRUCTIVE FEATURES:

In passive zinc-plated steel - Thickness: from 1.2 to 1.5 mm.
Slot: from Ø 10 to Ø 28 mm. 7 x 4.2
from Ø 32 to Ø 63 mm. 10 x 6.5

MORSETTI VOLANTI WITH SELF-EXTINGUISHABLE CUP

TECHNICAL FEATURES:

METAL PARTS IN BRASS BAR (OT 58)
 MOPLÉN AND POLYCARBONATE
 SELF-EXTINGUISHABLE CAPS
 LOCKING SCREW SHUT-THREAD.
 RATED VOLTAGE 450 V

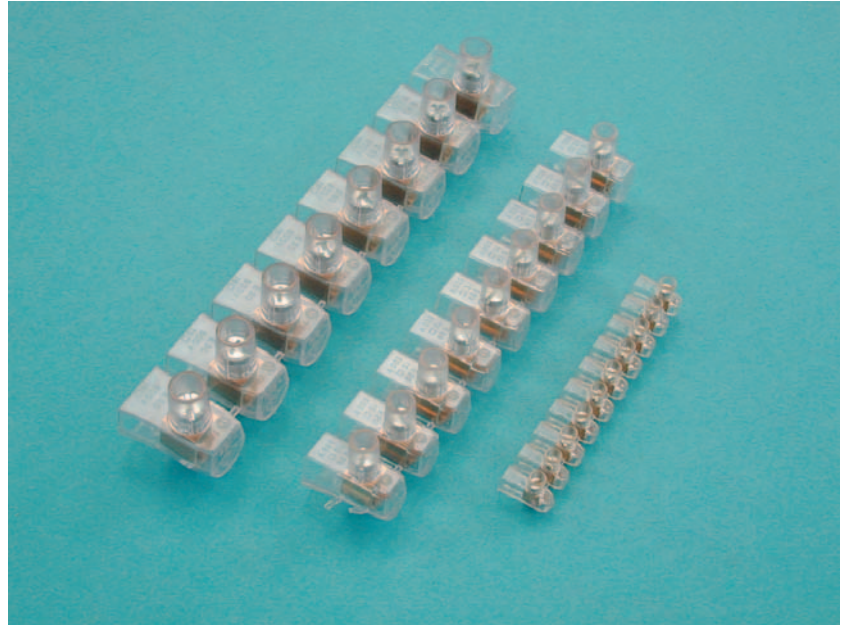

ART.	SECTION mm ²	CABLES mm ²	N° PZ. PACKAGING
7330	1,5	0,75 - 1 - 1,5	200
7331	2,5	1 - 1,5 - 2,5	100
7332	6	2,5 - 4 - 6	100
7333	10	4 - 6 - 10	100
7334	16	6 - 10 - 16	100

CABLE-CLAMPS

NUT

ART.	DESCR.	PACKAGING PZ.
4649	PG7	50
4650	PG9	50
4651	PG11	50
4652	PG13,5	50
4653	PG16	50
4654	PG21	25
4655	PG29	20
4656	PG36	10

CABLE-CLAMP

ART.	DESCR.	PACKAGING PZ.
4641	PG7	100
4642	PG9	50
4643	PG11	50
4644	PG13,5	50
4645	PG16	50
4646	PG21	25
4647	PG29	20
4648	PG36	10

METRICAL POLIAM. CABLE-CLAMP

ART.	DESCR.
4657	M 16X1,5 diam. 5-10
4658	M 20X1,5 diam. 6-12
4659	M 20X1,5 diam. 10-14
4660	M 20X1,5 diam. 10-14
4661	M 25X1,5 diam. 13-18
4662	M 25X1,5 diam. 13-18
4663	M 32X1,5 diam. 18-25
4664	M 40X1,5 diam. 22-32
4665	M 50X1,5 diam.
4666	M 63X1,5 diam.

Antitear Type

Hermetic

Colours: grey RAL 7001
 grey RAL 7035
 black RAL 9005

Material: Poliamide self-extinguishable

Packing: NBR

Protection: IP 68

Temperature: -40°C +120°C in a short time



4410


THERMOREDUCING SHEATHING IN PVC 105°C UL AND CSA APPROVATED

DESCRIPTION

The sheathing 4410, is a high quality thermoreducing PVC. It has a very competitive price and it is in the self-extinguishment standards VW-1 of UL 224. These features make it very versatile. It could be used to insulate, protect or to identify cables, pipes or copper bars.

MAIN FEATURES

- Continuous use temperature: from -30° C to + 105° C
- Reduction connection 2:1
- Flexible cable
- Self-extinguishable UL224 VW-1
- 17 standard sizes from 1,2 mm to 101,6 mm diameter
- Approval marks: UL/CSA

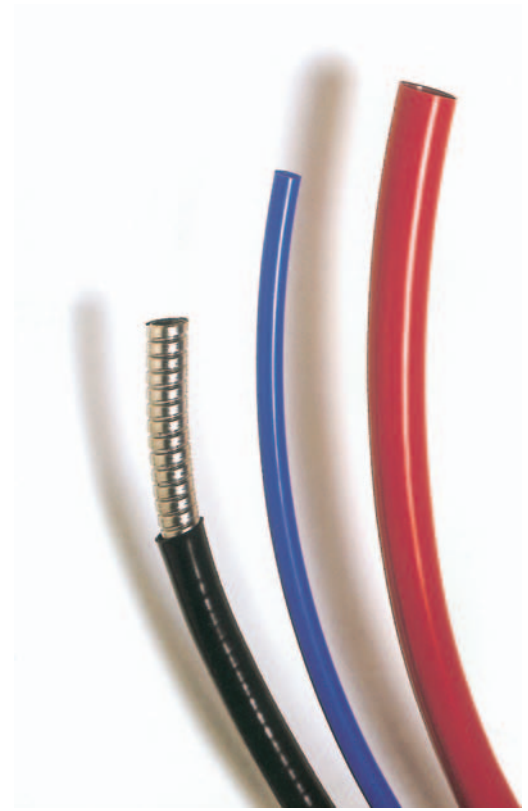

4410

FEATURES	METHOD OF TEST	TESTED VALUE
Resistance to traction	ISO 37	23,0 MPA
Extension to break	ISO 37	300%
Continuous use temperature	-	from -30°C to +105°C
Minimum temperature temperaturefor narrowing	-	160°C
Longitudinal retreat	ASTM D2671	from +5% to -10%
Specific weight	ISO/R1183	1,31
Dielectric rigidity	IEC 243	20kV/mm
Self-extinguishment	ASTM D2671	self-extinguishable (VW-1, UL224)
Extension after ageing heat test	ISO 37 (168 ore a 138°C)	250%
Flexibility to low temperature	ASTM D2671 (1 ore a -10°C)	No break or cleft
Water absorption	ASTM D570	max 0,5%
Resistance to fluids	ISO 1817, ISO 37 MIL-1-23053	Good - very good

SIZES

BEFORE NARROWING		AFTER NARROWING				Standard packaging Metres
Internal diameter (min) D		Internal diameter (max) d		Wall's thickness w		
mm	in	mm	in	mm	in	
1.6	1/16	0.8	1/32	0.45	.018	500
2.4	3/32	1.2	3/64	0.51	.020	500
3.2	1/8	1.6	1/16	0.51	.020	500
4.8	3/16	2.4	3/32	0.51	.020	250
6.4	1/4	3.2	1/8	0.64	.025	250
9.5	3/8	4.8	3/16	0.64	.025	125
12.7	1/2	6.4	1/4	0.64	.025	75
16.0	5/8	8.0	5/16	0.64	.025	150
19.0	3/4	9.5	3/8	0.83	.020	150
25.4	1	12.7	1/2	0.89	.035	100
32.0	1 1/4	16.0	5/8	0.89	.035	75
38.1	1 1/2	19.0	3/4	1.02	.040	50
50.8	2	25.4	1	1.14	.045	40
76.2	3	38.1	1 1/2	1.27	.050	10
101.6	4	50.8	2	1.40	.055	10

DIELECTRIC FLEXIBLE SELF-EXTINGUISHABLE 70° IN BLACK PVC CABLE



ART.	Ø int. mm.	mt.	ART.	Ø int. mm.	mt.
4301	1	500	4315	18	50
4302	2	200	4316	20	50
4303	3	200	4317	22	50
4304	4	100	4318	24	50
4305	5	100	4319	26	25
4306	6	100	4320	28	25
4307	7	100	4321	30	25
4308	8	100	4322	32	25
4309	9	100	4323	34	25
4310	10	100	4324	36	25
4311	11	100	4325	38	25
4312	12	100	4326	40	25
4313	14	50	4327	45	25
4314	16	50	4328	50	25

CONSTRUCTIVE FEATURES:

Special types (thickness and/or colours) made upon demand

DIELECTRIC FLEXIBLE SELF-EXTINGUISHABLE 70° IN BLACK PVC CABLE 105° HT



ART.	Ø int. mm.	mt.	ART.	Ø int. mm.	mt.
4301/HT	1	500	4315/HT	18	50
4302/HT	2	200	4316/HT	20	50
4303/HT	3	200	4317/HT	22	50
4304/HT	4	100	4318/HT	24	50
4305/HT	5	100	4319/HT	26	25
4306/HT	6	100	4320/HT	28	25
4307/HT	7	100	4321/HT	30	25
4308/HT	8	100	4322/HT	32	25
4309/HT	9	100	4323/HT	34	25
4310/HT	10	100	4324/HT	36	25
4311/HT	11	100	4325/HT	38	25
4312/HT	12	100	4326/HT	40	25
4313/HT	14	50	4327/HT	45	25
4314/HT	16	50	4328/HT	50	25

CONSTRUCTIVE FEATURES:

Special types (thickness and/or colours) made upon demand

GLASS SHEATHING TYPE 21C - 21F1



ART.	measure
4580 - 21C	for the measures
4582 - 21F1	see the price-list

COMPOSITION

- 21C - Plait of glass thread impregnated with white silicone paint.
- 21F1 - Plait of glass thread impregnated with black silicone paint.

PROPERTIES

- Thermal:
 - using temperature: 200°C Peaks of 600/700°C
 - sheathing totally un-combustible
 - indifferent to welding
- Electrical:
 - tension of breaking
 - dry at 100°C - 800 at 1000 V
- Chemical:
 - it resists at the most chemical products
 - it supports the impregnation of all the paint type B and FH
 - it's unattackable by moulds and fungus
 - when impregnated, it's not impermeable
- Mechanical:
 - flexible sheathing
 - good resistance at the folding and at alternate stress
 - avoid the friction on metal corners

USE

- Cables for electric appliance (radiators, convertors, irons, industrial cables, electro-thermal machines for the manufacturing of plastic and rubber materials, furnaces, stoves...)



GLASS SHEATHING TYPE 15C



ART.	measure
4590 - 15C 1,5	for the measures
4592 - 15C 2,5	see the price-list
4594 - 15C 4	

COMPOSITION

- 1 - Plant of glass-thread (400°C)
- 2 - Silicone rubber (250°C)

PROPERTIES

Thermal:

- joining the good thermal and mechanical resistance of the glass fibre with the flexibility, the chemical stability and dielectric rigidity of the silicone, it's the ideal insulating for conductors and equipments that have to support temperature from -60° to + 200° with occasional peaks of 280°
- the covering of the plait of glass-thread is uncombustible, so it assure the insulation from temperature higher than 280°, also before the impregnation with silicon-rubber

Electrical:

- it doesn't propagate flames
- it supports weldings very well
- working tension: 500 Volts
- breaking tension after 10 hours in 90% relative humidity:
 - 15C 1.5 : 1000 to 1500 Volts - red coloured
 - 15C 2.5 : 2000 to 3000 Volts - red coloured
 - 15C 4 : 3000 to 4000 Volts - red coloured

Chemical:

- good resistance at water (water vapours, alkaline or saline and azote solutions, UV radiations, acetone, alchool, ether, fats)
- it accepts projection of hydrocarbons and mineral oils

Mechanical:

- it's not attackable by moulds or fungus
- very flexible sheathing with an excellent resistance to foldings
- it supports vibrations and strong stress very well
- no problem also at high temperature

USE

- insulating for motors and rotating machines type H (180°C) and type C (220°C), transformers
- cables for electric and electronic systems dependent to extreme temperature (high or low), electric appliances and heating sets, stoves, measuring-controlling and regulating set, irons, welding-machines, etc.
- ideal insulating for ceiling lights and other lighting equipment



GLASS SHEATHING TYPE 13 F3

ART.

4596

measure

for the measures
see the price-list



COMPOSITION

- 1 - Plait of glass-thread (400°C)
- 2 - Poliuretanic paint (155°C)

PROPERTIES

Thermal:

- using temperature type F 155°C peaks of 170°C
- the un-combustible plait of glass-thread guarantee the insulation at 1000 V, also before the impregnation
- it doesn't propagate flames
- it supports welding

Electrical:

- working tension: 500 Volts
- dry breaking tension: 100°C Max 3000 Volts

Chemical:

- good resistance at water, water vapours and at all the corrosive and climatic agents usually find in electric constructions
- good resistance at oils and good adherence at all the paints type F
- it's not attackable by moulds and fungus

Mechanical:

- good paint elasticity
- good resistance at falding and at alternate stress
- excellent resistance at the ageing

Colour:

- natural

USE

- Insulating for motors and rotating machines type B (130°C) and type F (155°C)
- transformers, electric and electronic systems, cables for electric appliances and heating sets, radiators, convertors, electro-thermal machines for the manufacturing of plastic and rubber materials
- general insulation for temperature till 170°C



"VITTORIA" CHAIN



ART. 5702

CONSTRUCTIVE FEATURES:
Nickel plated steel

Packaging. Mt. 30

BARE SHEATHING




ART.	Ø int. mm.	Ø est. mm.	ART.	Ø int. mm.	Ø est. mm.
4101	6	8	4113	20	24
4102	7	9	4114	22	26
4103	8	11	4115	24	28
4104	9	12	4116	25	29
4105	10	13	4117	26	30
4106	11	14	4118	28	32
4107	12	15	4119	30	34
4108	13	16	4120	32	36
4109	14	18	4121	35	39
4110	15	19	4122	38	43
4111	16	20	4123	40	45
4112	18	22	4124	45	50
			4125	50	55

CONSTRUCTIVE FEATURES:
Flexible metal very strong zinc-plated sheathing, heavy type with simple hook to protect electric conductor

PLATE LIGHTS

Orientable halogen light

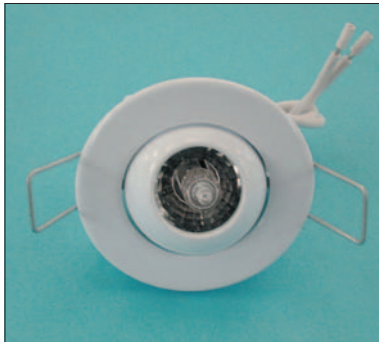


0420
0420/N
0420/CR
0420/OR

white coloured
 black coloured
 chrome coloured
 gold coloured

Hole: Ø 45 mm.
Connection: G4
Light: 20 W

Fixed halogen light

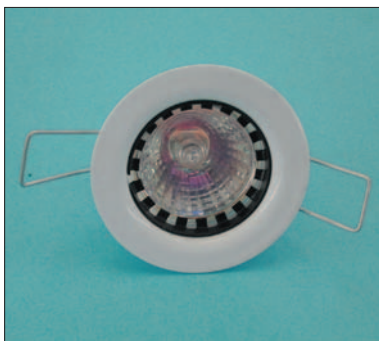


0421
0421/N
0421/CR
0421/OR

white coloured
 black coloured
 chrome coloured
 gold coloured

Hole: Ø 45 mm.
Connection: G4
Light: 20/35 W

Fixed halogen light

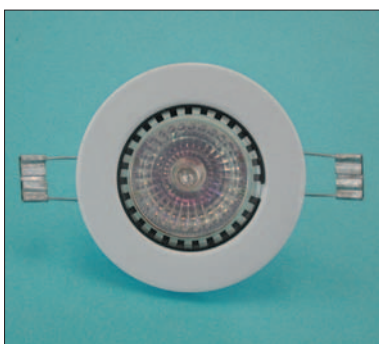

0465
0465/N
0465/CR
0465/OR

white coloured
 black coloured
 chrome coloured
 gold coloured

Hole: Ø 65 mm.
Connection: G5,3
Light: 20/50 W

Orientable halogen light



0480
0480/N
0480/CR
0480/OR

white coloured
 black coloured
 chrome coloured
 gold coloured

Hole: Ø 65 mm.
Connection: G4
Light: 20/35 W

PLATE LIGHTS

Fixed halogen light



0430
0430/N
0430/CR
0430/OR

white coloured
black coloured
chrome coloured
gold coloured

Hole: Ø 28 mm.
Connection: G4
Light: 20 W

Fixed halogen light



0453
0453/N
0453/CR
0453/OR

white coloured
black coloured
chrome coloured
gold coloured

Hole: Ø 60 mm.
Connection: G4
Light: 10/20 W

With protection glass

Fixed halogen light



0458
0458/N
0458/CR
0458/OR

white coloured
black coloured
chrome coloured
gold coloured

Hole: Ø 70 mm.
Connection: G4
Light: 10/20 W

Use on surface with
fixing plate

ALUMINIUM LIGHTS

Fixed halogen light



0475/AL
0475/CR
0475/OR

aluminium coloured
chromo coloured
gold coloured

Hole: Ø 65 mm.
Connection: GY 5,3
Light: 20/50 W

Orientable halogen light




0490/AL

aluminium coloured

Hole: Ø 65 mm.
Connection: GY 5,3
Light: 20/50 W

Fixed halogen light

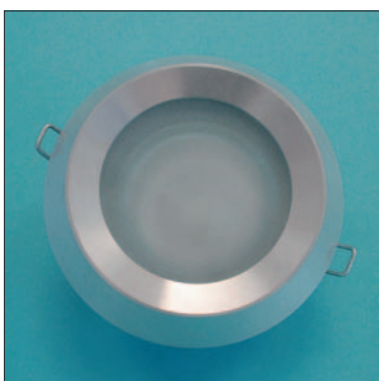


0463/AL
0463/CR
0463/OR

aluminium coloured
chromo coloured
gold coloured

Hole: Ø 74 mm.
Connection: GY 5,3
Light: 20/50 W

THERMOPLASTIC LIGHTS

Orientable halogen light

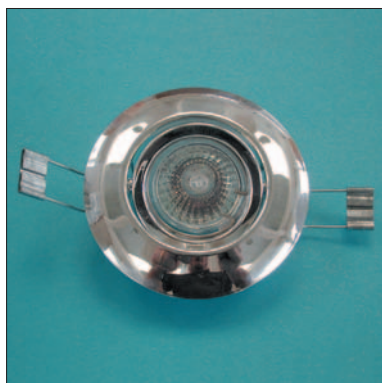

0440
0440/N
0440/OR
0440/ARG
0440/TR
0440/TR BLU

white coloured
black coloured
gold coloured
silvery coloured
transparency coloured
blue coloured

Hole: Ø 45 mm.
Connection: G5,3
Light: 20/50 W

Orientable halogen light



0441
0441/N
0441/OR
0441/ARG
0441/TR
0441/TR BLU

white coloured
black coloured
gold coloured
silvery coloured
transparency coloured
blue coloured

Hole: Ø 65 mm.
Connection: G5,3
Light: 20/50 W

Fixed halogen light



0442
0442/N
0442/OR
0442/ARG
0442/TR
0442/TR BLU

white coloured
black coloured
gold coloured
silvery coloured
transparency coloured
blue coloured

Hole: Ø 65 mm.
Connection: G5,3
Light: 20/50 W

LIGHT BULBS AND TRANSFORMERS

Halogen light bulb



0410

Dichroic light bulb
Ø 50 mm. for our
articles 0465-0480
0490-0475-0463

Halogen light bulb



0411

Dichroic light bulb
Ø 35 mm. for our
articles 0420-0421

Halogen light bulb



0412

Two-plugs light bulb
for our articles 0430-
0458-0453

Electronic transformers



0400

12V 60W
Type 2

0401

12V 105W
Type 2

BLISTERATED MATERIAL



1031/BLI



1031/F/BLI



1041/BLI



1041/F/BLI



0079/BLI



0080/BLI

BLISTERATED MATERIAL



0165/BLI white
 0165/N/BLI black
 0165/OR/BLI gold
 0165/ARG/BLI silvery



0166/BLI white
 0166/N/BLI black
 0166/OR/BLI gold
 0166/ARG/BLI silvery



0191/BLI white
 0191/N/BLI black
 0191/OR/BLI gold
 0191/ARG/BLI silvery



0193/BLI white
 0193/N/BLI black
 0193/OR/BLI gold
 0193/ARG/BLI silvery



0192/BLI white
 0192/N/BLI black
 0192/OR/BLI gold
 0192/ARG/BLI silvery




0194/BLI white
 0194/N/BLI black
 0194/OR/BLI gold
 0194/ARG/BLI silvery



3021/BLI white
 3021/N/BLI black
 3021/OR/BLI gold

ON DEMAND, ALL THE ARTICLES OF THIS CATALOGUE COULD BE BLISTERATED

FUSIBLE BARS IN ANTIARCO ALLOY

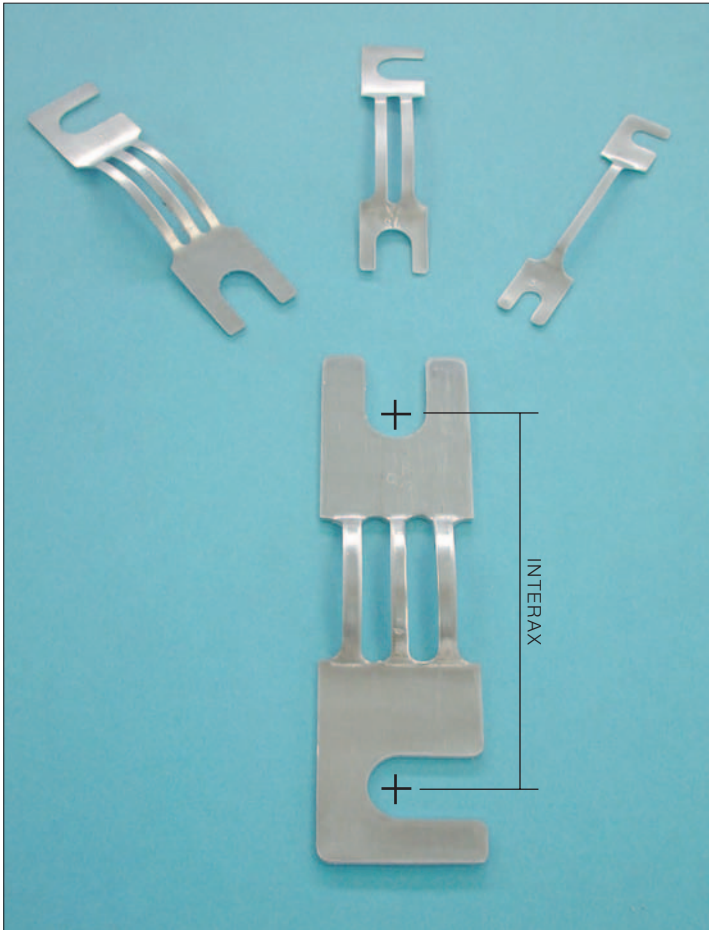

ART.		pz.
0295	amperage 30 Ampere interax 80	100
0296	amperage 40 Ampere interax 80	100
0297	amperage 50 Ampere interax 80	100
0298	amperage 60 Ampere interax 80	100
0299	amperage 75 Ampere interax 80	100
0301	amperage 85 Ampere interax 80	100
0302	amperage 100 Ampere interax 80	100
0303	amperage 120 Ampere interax 80	100
0305	amperage 130 Ampere interax 95	50
0306	amperage 140 Ampere interax 95	50
0307	amperage 150 Ampere interax 95	50
0308	amperage 160 Ampere interax 95	50
0309	amperage 175 Ampere interax 95	50
0310	amperage 200 Ampere interax 95	50
0311	amperage 225 Ampere interax 95	50
0312	amperage 250 Ampere interax 95	50
0313	amperage 275 Ampere interax 95	25
0314	amperage 300 Ampere interax 95	25
0315	amperage 325 Ampere interax 110	25
0316	amperage 350 Ampere interax 110	25
0317	amperage 375 Ampere interax 110	25
0318	amperage 400 Ampere interax 110	25
0319	amperage 450 Ampere interax 110	25
0320	amperage 500 Ampere interax 110	25
0321	amperage 600 Ampere interax 110	25
0324	amperage 700 Ampere interax 140	25
0325	amperage 800 Ampere interax 140	25
0326	amperage 900 Ampere interax 140	25
0327	amperage 1000 Ampere interax 140	25

